

**Director General CRPF**  
**Block No. 1 CGO Complex, New Delhi-110003**  
(Govt. of India/Ministry of Home Affairs)  
( Phone / Fax- 011-24360155)  
(E-Mail- digprov@crpf.gov.in)

No.U.II-98(Spec)/2020-21-Prov(T-Shirt)-14

Dated, the 30 September 2020

To

The IG, CoBRA Sector HQR,  
New Delhi.

**Subject: QRs/Specification of "Full Sleeves CoBRA Pattern T-Shirt" (addendum to revised QRs/Specification of "T-Shirt Half Sleeves Round Neck Disruptive Pattern" approved vide DG, CRPF letter No. U-II-98(Spec)/2017-18-Prov(T-Shirt) dated 07/12/2018)**

This is in continuation to revised QRs/Specification of "T-Shirt Half Sleeves Round Neck Disruptive Pattern" for CAPFs approved vide CRPF letter No. U-II-98(Spec)/2017-18-Prov-(T-Shirt) dated 07/12/2018 and to say that an addendum QRs/Specification of "Full Sleeves CoBRA Pattern T-Shirt" has been finalized by CAPFs Sub-Group and further approved by competent authority.

2. Henceforth, CoBRA Sector, CRPF may procure the above item strictly as per laid down addendum QRs/Specification of item read with revised QRs/Specification of "T-Shirt Half Sleeves Round Neck Disruptive Pattern" approved vide DG, CRPF letter No. U-II-98(Spec)/2017-18-Prov(T-Shirt) dated 07/12/2018.

3. This has the approval of DG, CRPF vide E-Office No. 6936 dated 02/09/2020 (empowered vide MHA letter F.No. 11012/02/2009-Fin-I-17 dated 02/01/2018).

Encl: As above.

  
(D.N. Laal)  
DIG (Prov)

No.U.II-98(Spec)/2020-21-Prov(T-Shirt)-14

Dated, the September 2020

Copy forwarded to:-

1. The DS(Prov), MHA, Police Modernization Division, 26, Jaisalmer House, Mansingh Road, New Delhi-110011 for information please.
2. The DsG: AR, BSF, CISF, ITBP, NSG, SSB and BPRD for information.
3. DIG(IT), Dte Genl., CRPF-with request to upload this Addendum of revised QRs/Specification of "Full sleeves CoBRA Pattern T-Shirt" to CRPF Portal and Selo Module.

  
(D.N. Laal)  
DIG (Prov)

## Full Sleeves CoBRA Pattern T-Shirt

### a. For Poly-Cotton T-Shirt

- i. **Material** : The material used in the manufacture of the full arm sleeve and cuff of T-shirt shall conform to the following specifications :

S/No.	Specifications	Requirement	Test method
1	Fibre identification / Composition <b>For full arm sleeve</b>	Cotton : 58±3% Polyester : Remainder	AATCC 20:2011 and AATCC 20A:2012
	<b>For Cuff</b> (On Dry mass basis)	Cotton : 56 ± 3% Polyester : Remainder Elastane : 2 % Min	IS: 667/AATC-20 AATCC-20-A/IS:3416

ii. **Manufacture and Workmanship/Operation :**

S/No.	Operation	Stitch Code	Needle Size	Thread Size	Machine Used
1.	Cuff Rib Joining	514	11-Ball Point	80/120	Four thread overlock machine
2.	Top Stitch on Cuff Rib	406	11-Ball Point	80/120	Two needles flat lock machines with needle gauge 4mm

- iii. **CUFF RIB**: The cuffs of the T-shirt should have 1x1 rib.

### b. For 100 % Cotton T-Shirt

- i. **Material** : The material used in the manufacture of the full arm sleeve and cuff of T-shirt shall conform to the following specifications :

S/No.	Specifications	Requirement	Test method
1	Fibre identification / Composition <b>For full arm sleeve</b>	Cotton : 100 %	AATCC 20:2011 and AATCC 20A:2012
	<b>For Cuff</b> (On Dry mass basis)	Cotton : 97 ± Max Elastane : Remainder (%)	IS: 667/AATC-20 AATCC-20-A/IS:3416

ii. **Manufacture and Workmanship/Operation :**

S/No.	Operation	Stitch Code	Needle Size	Thread Size	Machine Used
1.	Cuff Rib Joining	514	11-Ball Point	80/120	Four thread overlock machine
2.	Top Stitch on Cuff Rib	406	11-Ball Point	80/120	Tow needles flat lock machines with needle gauge 4mm

*[Signature]*  
CMTA

*[Signature]*  
S & B

*[Signature]*  
TIBP

*[Signature]*  
Arum Pab

*[Signature]*  
COBRA

*[Signature]*

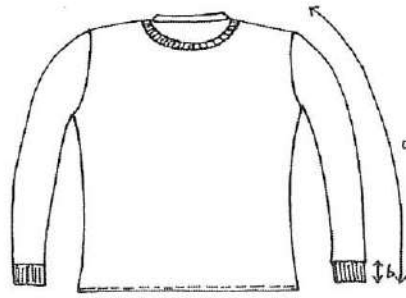
iii. **CUFF RIB:** The cuffs of the T-shirt should have 1x1 rib.

4. The length of the sleeves against various sizes is as shown below:-

Size specification of T-shirt (full sleeves round neck)							
Sl. No.	Size	Sizes in inches					Tolerance
		S	M	L	XL	XXL	
a	Sleeve length	23.5	24	24.5	25	26	±0.25
b	Length of cuff rib	2	2	2	2	2	-

**Note:** - The above table can be read with "Size specification of T-shirt (half sleeves round neck)" given in Appendix - 'A' of QRs conveyed by Dte.Genl, CRPF vide letter No.U.II-98(Spec)/2017-18-Prov-(T/Shirt) dated 07/12/2018.

5. The diagram shown below can be used for reference:



a - sleeve length  
b - length of cuff rib

Shree  
CSF

ESB.

17RP

Arjun  
Rtd.

Sy  
COBRA

RAM

**Director General CRPF**  
**Block No. 1 CGO Complex, New Delhi-110003**  
(Govt. of India/Ministry of Home Affairs)  
( Phone / Fax- 011-24360155)  
(E-Mail- digprov@crpf.gov.in)

No.U.II-98(Spec)/2017-18-Prov-(T-Shirt)

Dated, the 7 December 2018

To

The DsG: AR, BSF, CISF, ITBP, NSG, SSB and BPRD


**Subject: Revised QRs/Specification of "T-Shirt Half Sleeves Round Neck Disruptive Pattern" for CAPFs.**

This is with reference to BSF letter No. 401/Prov-CTS(NC)/BSF/SPN/T-Shirt Round Neck/2013/1519-23 dated 28/08/2015 regarding proposal for revision of QRs/Specification of "T-Shirt Half Sleeves Round Neck Disruptive Pattern" that was approved vide MHA letter U-II-98(Spec)2013-14-Prov-1166 dated 26/11/2013 and to say that revised QRs/Specification has been finalized by Sub-Group of CAPFs and further approved by Competent Authority.

2. Henceforth, all the CAPFs may procure the above item required by them, strictly as per the laid down revised QRs/Specification. The earlier QRs/Specification of T-Shirt Round Neck Disruptive Pattern approved vide MHA letter No. U-II-98(Spec)/2013-14-Prov-2013-14-Prov-1166 dated 26/11/2013 is rescinded.

3. This has the approval of DG, CRPF vide E-Office No. 144 dated 07/12/2018 (empowered vide MHA letter F.No. 11012/02/2009-Fin-I-17 dated 02/01/2018).

Encl: As above.

  
R.K. Thakur  
DIG (Prov)

No.U.II-98(Spec)/2017-18-Prov-(T-Shirt)-14

Dated, the December 2018

Copy forwarded to:-

1. SO (IT), North Block-with request to upload the approved QRs/Specification of "T-Shirt Half Sleeves Round Neck Disruptive Pattern" to MHA Website. For information and necessary action please on his e-mail ID soit@nic.in
2. DIG(IT), Dte Genl., CRPF -with request to upload this approved QRs/Specification of "T-Shirt Half Sleeves Round Neck Disruptive Pattern" for CAPFs to CRPF Portal and Selo Module.

/   
R.K. Thakur  
DIG (Prov)

(3) (1)

**QRs/ Specifications of "T-Shirt Half Sleeves Round Neck Disruptive Pattern"**

1. **Applicability-** These specifications relate to the manufacturing details of the T-Shirt Half Sleeves Round Neck Disruptive Pattern (Regular & Green Pattern)

2. **Salient Features:**

The salient features of the garment are: **Poly-Cotton T-Shirt**

3. **Materials**

The materials used in the manufacture and packing of the T-Shirt shall conform to the following Standard Specifications:

The T-Shirt shall be manufactured out of well and evenly single jersey knitted fabric. The constructional details of the fabric are as given under. The knitted fabric shall not be overloaded or pulled in length while calendaring.

S. No.	Specifications	Requirement	Test Method*
1.	Fibre Identification/ Composition  <b>Except Neck</b>  <b>For Neck</b> (On Dry mass basis)	Cotton : 58 ± 3% Polyester : Remainder  Cotton : 56 ± 3% Polyester : Remainder Elastane : 2% Min	AATCC 20:2011 and AATCC 20A:2012  IS: 667/AATC-20 AATCC-20-A/IS:3416
2.	Dimensional Stability	± 3.5% (Both directions), Maximum	IS 2977-1989
3.	Fabric Weight	200 <sup>l</sup> to 220 (g/m <sup>2</sup> )	IS 1964 : 2001
4.	Colour Fastness to Rubbing	Dry: 3-4 or better Wet: 3-4 or better	IS 766-1988
5.	Colour Fastness to Light	4-5 or better (On blue wool)	IS 2454: 1985
6.	Colour Fastness to Washing	Change in Colour: 4 or better Staining on Cotton: 4 or better	IS/ISO 105 C 10 D (4): 2006
7.	Colour Fastness to Perspiration	4 or better	IS 971:1983
8.	Spirality after one Wash	<b>4% Maximum</b>	IS/ISO 16322-1: 2005 (Washing as per ISO 6330-5A at 40°C followed by flat dry)
9.	Banned Azo Colorants	30 mg per Kg, Maximum	IS 15570 : 2005
10.	pH Value of aqueous extract (Cold method)	6.0 to 8.5	IS 1390 : 1983
11.	Count per yarn, Ne	24's (for manufacturer's guidance)	IS:3442-1980
12.	Wales per Inch Course per Inch	32 Minimum 48 Minimum	Visual
13.	Type of Knit	Single Jersey (Plain Knit)	Visual

\* Latest version of testing Method will be used.

(2)

4. **Design** : The T-Shirt shall be round neck disruptive pattern (Regular & Green Pattern)

Portion to be stitched	Type of stitch	Thread in the Needles	Thread in the loopers
Round Neck – (Crew Neck) T-Shirt and armholes	Overlock & Flat Lock Stitches	80/120	80/120
<b>Note: Ticket No. 80/120 Spun Polyester are used in the needles and loopers.</b>			

5. **Manufacture and Workmanship/ Operation:**

S.No.	Operation	Stitch Code	Needle Size	Thread Size	Machine Used
1.	Front & Back Shoulder Joining	514	11-Ball Point	80/120	Four Thread Overlock Machines
2.	Sleeve Joining	514	11-Ball Point	80/120	Four Thread Overlock Machines
3.	Side Seam Joining	514	11-Ball Point	80/120	Four Thread Overlock Machines
4.	Neck Rib Joining	514	11-Ball Point	80/120	Four Thread Overlock Machines
5.	Top Stitch on Neck Rib	406	11-Ball Point	80/120	Two Needles Flat Lock Machines with needle gauge 4mm
6.	Sleeve & Bottom Hemming	406	11-Ball Point	80/120	Two Needles Flat Lock Machines with needle gauge 8mm

**Note:** The number of stitches shall not be less than 12 stitches per inches.

6. **Shape and dimensions**

The T-Shirt shall confirm to the requirement given in (Annexure-A)

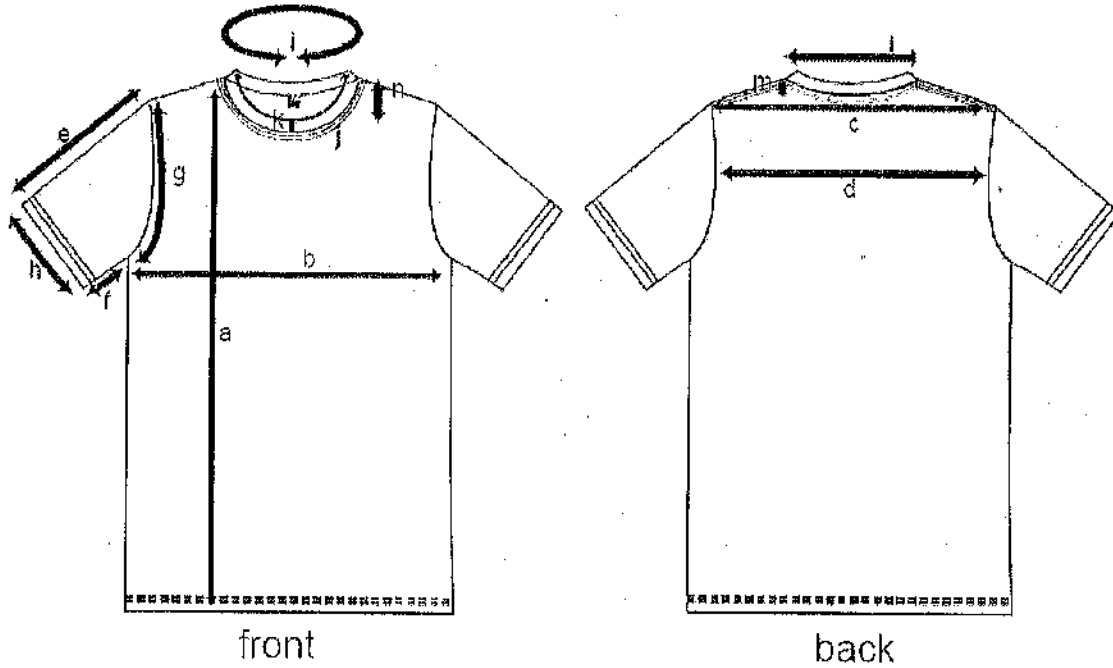
7. **Packaging**

S.No.	Materials	Dimension
1.	Re-Cycle Card-Board 300 gsm	26 cm x 22 cm
2.	Transparent Polybag (Printed on bag: Kindly dispose after used)	35 cm x 27 cm
3.	Plastic Packing Clip (U Shape)	4.0 cm x .7 cm x .3 cm
4.	Paper Strip/ Fabric Ribbon strip	If required
5.	Wash Care Label, Stamp-Ink on Center Back Neck	Standard Size 3 cm x 4 cm

83

Annexure-A

MENS T-SHIRT



Size Specification of T-Shirt (half sleeves round neck)							Tolerance
Sl. No.	Size	Size in inches					
		S	M	L	XL	XXL	
a	length from (HSP)	28.5	29	29.5	30	31	±0.5
b	chest width round	40	42	44	46	48	±1.0
c	shoulder seam to seam	17.5	18	18.5	19	19.5	±0.25
d	across back 4" down from center back	16.5	17	17.5	18	18.5	±0.25
e	sleeve length	8.5	9	9.5	10	10.5	±0.25
f	inseam length	4	4.5	5	5.5	6	±0.25
g	arm hole curve round	19	20	21	22	23	±0.25
h	sleeve opening (round)	14	14	14.5	15	15.5	±0.25
i	neck rib round	17.5	18	18.5	19	19.5	±0.25
j	neck round on seam	23	23.5	24	24.5	25	±0.25
k	neck rib height	1	1	1	1	1	-
l	neck width shoulder seam to shoulder seam	7.75	8	8.25	8.5	8.75	±0.15
m	back neck drop	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	-
n	front neck drop	3	3	3	3	3	±0.15

Handwritten signatures and initials at the bottom of the page: C/SF, JTB, B.S.F., A.S.L., NSG, S.S.B., CRPF.

(16) (4)

## QRs/ Specifications of "T-Shirt Half Sleeves Round Neck Disruptive Pattern"

1. **Applicability-** These specifications relate to the manufacturing details of the T-Shirt Half Sleeves Round Neck Disruptive Pattern (Regular & Green Pattern)
2. **Salient Features:**

The salient features of the garment are: 100% Cotton T-Shirt

3. **Materials**

The materials used in the manufacture and packing of the T-Shirt shall conform to the following Standard Specifications:

The T-Shirt shall be manufactured out of well and evenly single jersey knitted fabric. The constructional details of the fabric are as given under. The knitted fabric shall not be overloaded or pulled in length while calendaring.

S. No.	Specifications	Requirement	Test Method*
1.	Fibre Identification/ Composition  <b>Except Neck</b>  <b>For Neck</b> (On Dry mass basis)	Cotton : 100%  Cotton : 97 % Max Elastane : Remainder (%)	AATCC 20:2011 and AATCC 20A:2012  IS: 667/AATC-20 AATCC-20-A/IS:3416
2.	Dimensional Stability	±3.5% (Both directions)	IS 2977-1989
3.	Fabric Weight	200 to 220 (g/m <sup>2</sup> )	IS 1964 : 2001
4.	Colour Fastness to Rubbing	Dry: 3-4 or better Wet: 3-4 or better	IS 766-1988
5.	Colour Fastness to Light	4-5 or better	IS 2454: 1985
6.	Colour Fastness to Washing	Change in Colour: 4 or better Staining on Cotton: 4 or better	IS/ISO 105 C 10 D (4): 2006
7.	Colour Fastness to Perspiration	4 or better	IS 971:1983
8.	Spirality after one Wash	±4% Maximum	IS/ISO 16322-1: 2005 (Washing as per ISO 6330-2A at 60°C followed by flat dry)
9.	Banned Azo Colorants	30 mg per Kg, Maximum	IS 15570 : 2005
10.	pH Value of aqueous extract (Cold method)	6.0 to 8.5	IS 1390 : 1983
11.	Count per yarn, Ne	24's (for manufacturer's guidance)	IS:3442-1980
12.	Wales per Inch, Course per Inch,	32 Minimum 48 Minimum	Visual
13.	Type of Knit	Single Jersey (Plain Knit)	Visual

\* Latest version of testing Method will be used.

  
CISF


  
JABP

  
BSR

  
AR

  
NSG.

  
SSB

  
CRPF



(7) (5)

4. **Design** : The T-Shirt shall be round neck disruptive pattern (Regular & Green Pattern)

Portion to be stitched	Type of stitch	Thread in the Needles	Thread in the loopers
Round Neck – (Crew Neck) T-Shirt and armholes	Overlock & Flat Lock Stitches	80/120	80/120
<b>Note: Ticket No. 80/120 Spun Polyester are used in the needles and loopers.</b>			

5. **Manufacture and Workmanship/ Operation:**

S.No.	Operation	Stitch Code	Needle Size	Thread Size	Machine Used
1.	Front & Back Shoulder Joining	514	11-Ball Point	80/120	Four Thread Overlock Machines
2.	Sleeve Joining	514	11-Ball Point	80/120	Four Thread Overlock Machines
3.	Side Seam Joining	514	11-Ball Point	80/120	Four Thread Overlock Machines
4.	Neck Rib Joining	514	11-Ball Point	80/120	Four Thread Overlock Machines
5.	Top Stitch on Neck Rib	406	11-Ball Point	80/120	Two Needles Flat Lock Machines with needle gauge 4mm
6.	Sleeve & Bottom Hemming	406	11-Ball Point	80/120	Two Needles Flat Lock Machines with needle gauge 8mm

**Note:** The number of stitches shall not be less than 12 Stitch per inches.

6. **Shape and dimensions**

The T-Shirt shall conform to the requirement given in (Annexure-B)

7. **Packaging**

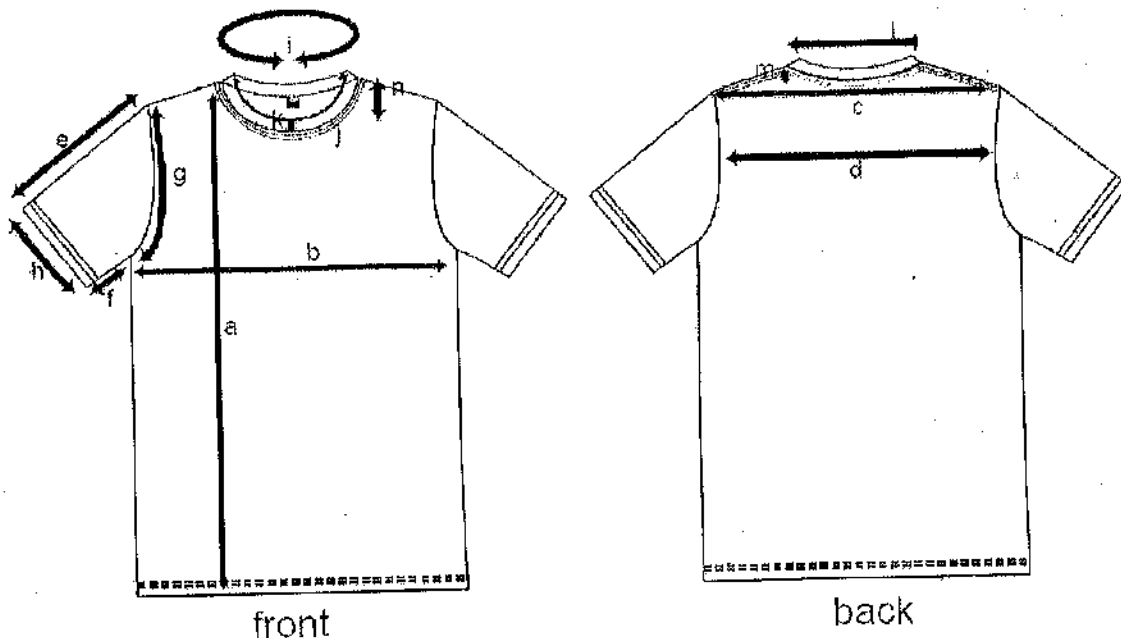
S.No.	Materials	Dimension
1.	Re-Cycle Card-Board 300 gsm	26cm x 22cm
2.	Transparent Polybag (Printed on bag: Kindly dispose after used)	35cm x 27cm
3.	Plastic Packing Clip (U Shape)	4.0 cm x .7 cm x .3 cm
4.	Paper Strip/ Fabric Ribbon strip	If required
5.	Wash Care Label, Stamp-Ink on Center Back Neck	Standard Size 3cm x 4cm

*(Handwritten signatures and initials)*  
C/SF      JTBP      BSF      5      NSG.      SSB      CAPF

② ⑥

Annexure-B

MENS T-SHIRT



Size Specification of T-Shirt (half sleeves round neck)							Tolerance
Sl. No.	Size	Size in inches					
		S	M	L	XL	XXL	
a	length from (HSP)	28.5	29	29.5	30	31	±0.5
b	chest width round	40	42	44	46	48	±1.0
c	shoulder seam to seam	17.5	18	18.5	19	19.5	±0.25
d	across back 4" down from center back	16.5	17	17.5	18	18.5	±0.25
e	sleeve length	8.5	9	9.5	10	10.5	±0.25
f	inseam length	4	4.5	5	5.5	6	±0.25
g	arm hole curve round	19	20	21	22	23	±0.25
h	sleeve opening (round)	14	14	14.5	15	15.5	±0.25
i	neck rib round	17.5	18	18.5	19	19.5	±0.25
j	neck round on seam	23	23.5	24	24.5	25	±0.25
k	neck rib height	1	1	1	1	1	-
l	neck width shoulder seam to shoulder seam	7.75	8	8.25	8.5	8.75	±0.15
m	back neck drop	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	-
n	front neck drop	3	3	3	3	3	±0.15

CBF    ITBP    BSF    NSG    SSB    CAPP

# BORDER SECURITY FORCE (BSF) STANDARD




SPECIFICATION FOR COLOUR CODE  
OF CLOTH DISRUPTIVE PATTERN


  
CISF

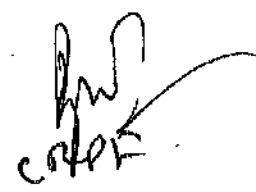
  
ITBP

  
BSF

  
BSF

  
NSG

  
SSB

  
CAPF

(10) (8)

BSF



Fig. : SPECIFICATION FOR COLOUR CODE  
OF CLOTH DISRUPTIVE PATTERN

*[Signature]*  
CISF

*[Signature]*  
ITBP

*[Signature]*  
BSF

*[Signature]*  
8102

*[Signature]*  
NSS  
SSB

*[Signature]*  
CRPF

(11) (9)

BSF

Table-1A : Colour Specification of Disruptive Pattern-(Brown)

(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour : BROWN

System : CIE LCH

Illuminant Observer : D-65

Standard Observer : 10 Degree

Tristimulus Values	X	Y	Z
	5.664	5.640	4.432

LCH	L	C	H
	28.485	8.448	63.758

CMC (l:c) : 2:1

Colour Difference,  $\Delta E_{cmc}$  :  $\leq 3.0$

Interpretation of Results:

- i) If  $\Delta E_{cmc}$  is less than or equal to 3, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Diffuse (sphere) geometry spectrophotometer.

CSF, ITBP, BSF, 9/12, NSG, SSB, CRPF

(12) (10)

BSF

Table-1B : Colour Specification of Disruptive Pattern -(Green)

(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

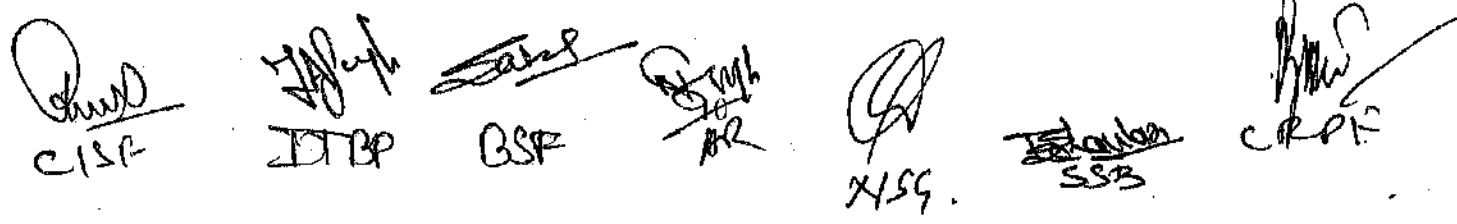
Colour	:	GREEN						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>4.103</td> <td>4.654</td> <td>4.176</td> </tr> </tbody> </table>	X	Y	Z	4.103	4.654	4.176
X	Y	Z						
4.103	4.654	4.176						
LCH	:	<table border="1"> <thead> <tr> <th>L</th> <th>C</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>25.725</td> <td>5.988</td> <td>135.782</td> </tr> </tbody> </table>	L	C	H	25.725	5.988	135.782
L	C	H						
25.725	5.988	135.782						
CMC (l:c)	:	2:1						
Colour Difference, $\Delta E_{cmc}$	:	$\leq 3.0$						

Interpretation of Results:

- i) If  $\Delta E_{cmc}$  is less than or equal to 3, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.


  
 CISP      JTB      BSF      AR      XSC      SSB      CRP

(13) (11)

BSF

**Table-1C : Colour Specification of Disruptive Pattern-(Khaki)**

(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour	:	KHAKI						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1"><thead><tr><th>X</th><th>Y</th><th>Z</th></tr></thead><tbody><tr><td>16.918</td><td>17.722</td><td>10.822</td></tr></tbody></table>	X	Y	Z	16.918	17.722	10.822
X	Y	Z						
16.918	17.722	10.822						
LCH	:	<table border="1"><thead><tr><th>L</th><th>C</th><th>H</th></tr></thead><tbody><tr><td>49.157</td><td>19.275</td><td>87.970</td></tr></tbody></table>	L	C	H	49.157	19.275	87.970
L	C	H						
49.157	19.275	87.970						
CMC (l:c)	:	2:1						
Colour Difference, $\Delta E_{cmc}$	:	$\leq 3.0$						


**Interpretation of Results:**


- i) If  $\Delta E_{cmc}$  is less than or equal to 3, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.

  
ABR


  
ITBP

  
BSF

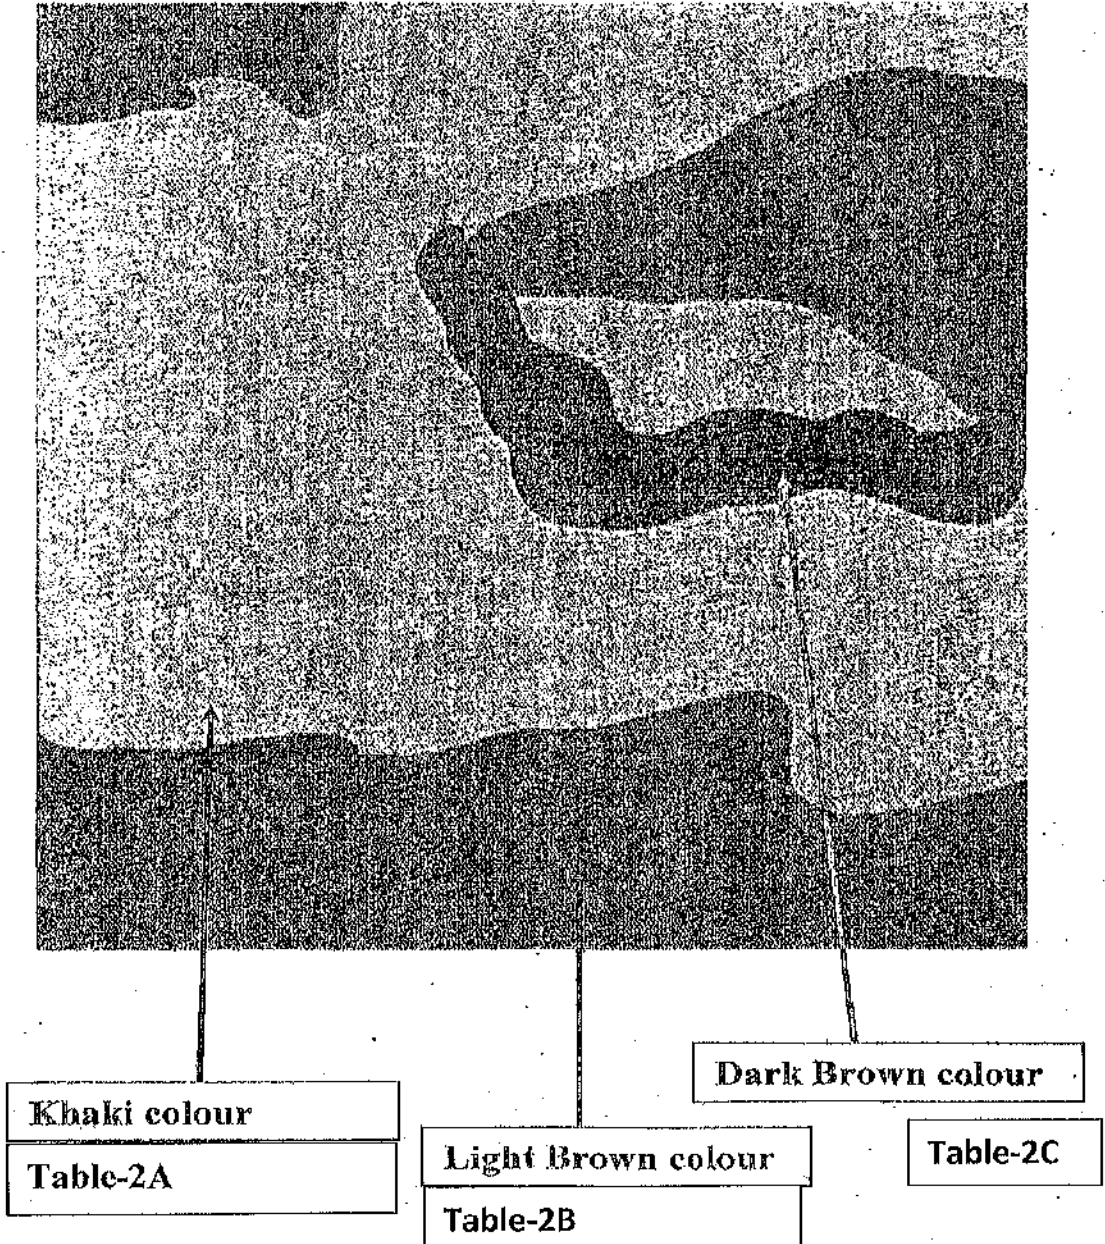
  
AR

  
NSG

  
SSB

  
CRP

# CENTRAL INDUSTRIAL SECURITY FORCE (CISF)



Picture of disruptive pattern cloth

## COLOUR SPECIFICATION OF Cloth Disruptive Pattern-CISF

*[Handwritten signatures and initials]*  
CISF    ITBP    BSF    *[Signature]*    NSG    *[Signature]*    SSB    *[Signature]*



15 13

CISF

**Table-2A: Colour Specification of Cloth Disruptive Pattern-Khaki**  
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour	:	KHAKE COLOUR		
System	:	CIE LCH		
Illuminant Observer	:	D-65		
Standard Observer	:	10 Degree		
Tristimulus Values	:	X	Y	Z
		19.649	19.862	12.822
LCH	:	L	C	H
		51.681	18.678	76.999
CMC (l:c)	:	2:1		
Colour Difference, $\Delta E_{cmc}$	:	$\leq 3$		

**Interpretation of Results:**

- i) If  $\Delta E_{cmc}$  is less than or equal to 3, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3, the sample is unacceptable.

**Note-1 :** Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

**Note-2** Test should be carried out after proper conditioning as per AATCC 173 using Diffuse (sphere) geometry spectrophotometer.

CISF      ITBP      BSE      13 AR      NSS      SSB      CRPF

16 14

CISF

**Table-2B : Colour Specification of Cloth Disruptive Pattern-Light Brown**  
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

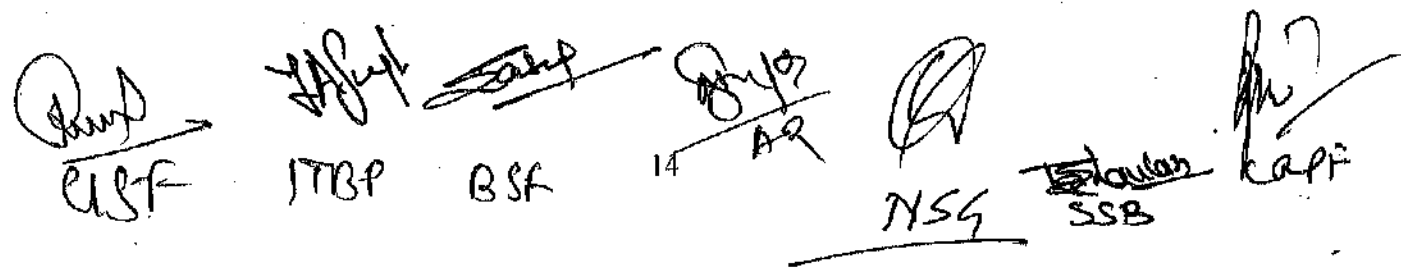
Colour	:	LIGHT BROWN COLOUR		
System	:	CIE LCH		
Illuminant Observer	:	D-65		
Standard Observer	:	10 Degree		
Tristimulus Values	:	X	Y	Z
		7.187	7.007	3.972
LCH	:	L	C	H
		31.823	16.740	70.802
CMC (l:c)	:	2:1		
Colour Difference, $\Delta E_{cmc}$	:	$\leq 3$		

**Interpretation of Results:**

- i) If  $\Delta E_{cmc}$  is less than or equal to 3.0, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3.0, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.


  
 CISF      ITBP      BSA      14      AR      NSG      SSB      KAP

17 15

CISF

**Table-2C: Colour Specification of Disruptive Pattern-Dark Brown colour**  
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour : DARK BROWN COLOUR

System : CIE LCH

Illuminant Observer : D-65

Standard Observer : 10 Degree

Tristimulus Values :

X	Y	Z
4.924	4.651	2.999

LCH :

L	C	H
25.716	13.115	58.976

CMC (l:c) : 2:1

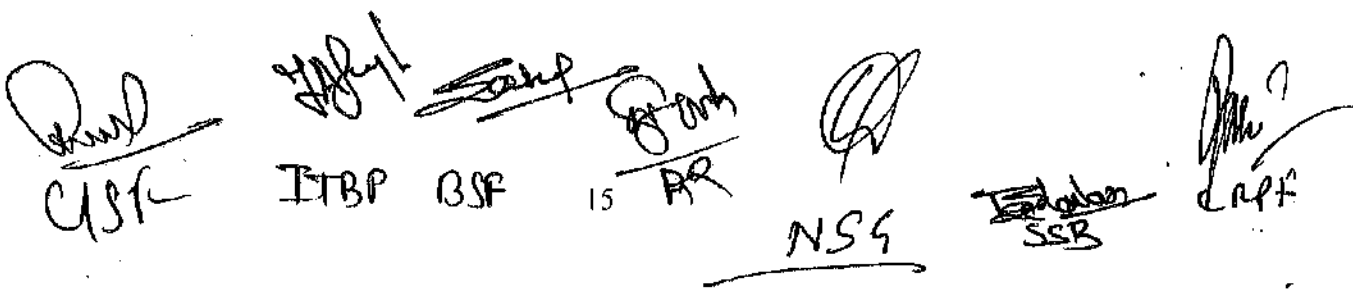
Colour Difference,  $\Delta E_{cmc}$  :  $\leq 3.0$

Interpretation of Results:

- i) If  $\Delta E_{cmc}$  is less than or equal to 3.0, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3.0, the sample is unacceptable.

Note-1 : Absorbance/reflectance/transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/fibre composition.

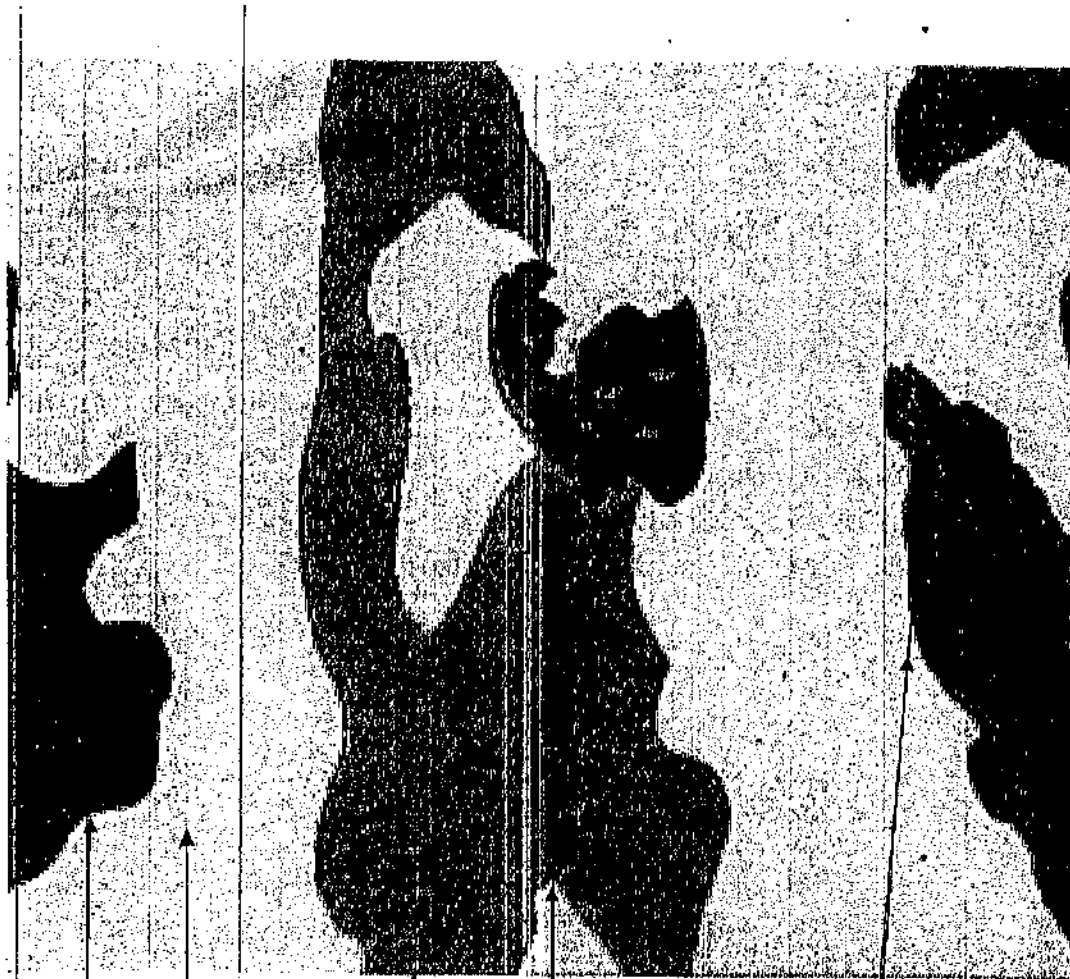
Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.


  
 CISF    ITBP    BSF    15    RR    NSG    SSR    CRFF

(18) (16)

ITBP

# INDO TIBETAN BORDER POLICE FORCE



Dark Green  
Table-3C

Beige  
Table-3E

Light Brown  
Table-3B

Light Green  
Table-3D

Dark Brown  
Table-3A

*[Signature]*  
CISF

*[Signature]*  
ITBP

*[Signature]*  
BSF

*[Signature]*  
16

*[Signature]*  
NSS

*[Signature]*  
SSB

*[Signature]*  
CISF

**Table-3A: Colour Specification of Cloth Disruptive (Regular Pattern)-Dark Brown**  
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour : 

Dark Brown
------------

System : 

CIE LCH
---------

Illuminant Observer : 

D-65
------

Standard Observer : 

10 Degree
-----------

Tristimulus Values :

X	Y	Z
13.085	11.287	5.878

LCH :

L	C	H
40.060	26.656	50.968

CMC (l:c) : 2:1

Colour Difference,  $\Delta E_{cmc}$  :  $\leq 3.0$

**Interpretation of Results:**

- i) If  $\Delta E_{cmc}$  is less than or equal to 3, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.

20 18

ITBP

**Table-3B : Colour Specification of Cloth Disruptive (Regular Pattern)-Light Brown**  
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour	:	LIGHT BROWN						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>18.264</td> <td>16.229</td> <td>8.161</td> </tr> </tbody> </table>	X	Y	Z	18.264	16.229	8.161
X	Y	Z						
18.264	16.229	8.161						
LCH	:	<table border="1"> <thead> <tr> <th>L</th> <th>C</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>47.274</td> <td>29.191</td> <td>56.583</td> </tr> </tbody> </table>	L	C	H	47.274	29.191	56.583
L	C	H						
47.274	29.191	56.583						
CMC (l:c)	:	2:1						
Colour Difference, $\Delta E_{cmc}$	:	$\leq 3.0$						

**Interpretation of Results:**

- i) If  $\Delta E_{cmc}$  is less than or equal to 3.0, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3.0, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.

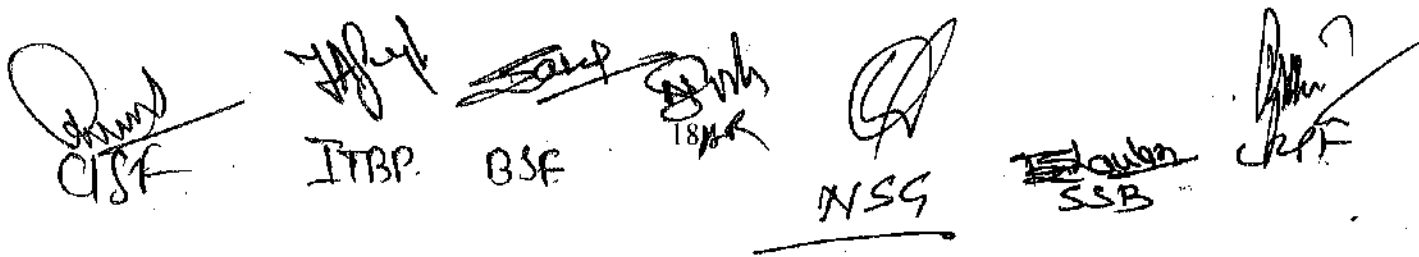

  
 ITBP      BSE      NSS      SSB

Table-3C: Colour Specification of Cloth Disruptive (Regular Pattern)-Dark Green  
(Guideline of AATCC Test Method 173: 2009 & AATCC Evaluation Procedure-7:2009)

Colour : DARK GREEN

System : CIE LCH

Illuminant Observer : D-65

Standard Observer : 10 Degree

Tristimulus Values :

X	Y	Z
8.002	8.405	5.392

LCH :

L	C	H
34.812	13.823	88.617

CMC (l:c) : 2:1

Colour Difference,  $\Delta E_{cmc}$  :  $\leq 3.0$

Interpretation of Results:

- i) If  $\Delta E_{cmc}$  is less than or equal to 3.0, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3.0, the sample is unacceptable.

Note-1 : Absorbance/reflectance/transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/fibre composition.

Note-2: Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.

C/SF      ITBP      BSF      19/08/09 DR      NSG      SSB      CRP

Table-3D : Colour Specification of Cloth Disruptive (Regular Pattern)-Light Green  
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour : LIGHT GREEN

System : CIE LCH

Illuminant Observer : D-65

Standard Observer : 10 Degree

Tristimulus Values	X	Y	Z
	12.159	12.854	8.200

LCH	L	C	H
	42.542	16.081	90.635

CMC (l:c) : 2:1

Colour Difference,  $\Delta E_{cmc}$  :  $\leq 3.0$


Interpretation of Results:


- i) If  $\Delta E_{cmc}$  is less than or equal to 3.0, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3.0, the sample is unacceptable.


Note-1 : Absorbance/reflectance/transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/fibre composition.


Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.


  
CSF

  
ITBP

  
BSF

  
AR

  
NSG

  
SB

  
CRP



23 21

ITBP

Table-3E: Colour Specification of Cloth Disruptive (Regular Pattern)-Beige Colour  
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour : BEIGE COLOUR

System : CIE LCH

Illuminant Observer : D-65

Standard Observer : 10 Degree

Tristimulus Values :

X	Y	Z
50.337	51.005	44.003

LCH :

L	C	H
76.682	12.475	64.237

CMC (l:c) : 2:1

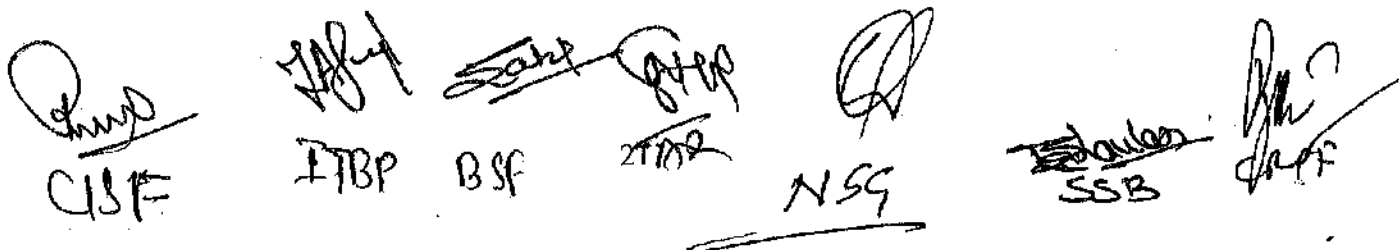
Colour Difference,  $\Delta E_{cmc}$  :  $\leq 3.0$

Interpretation of Results:

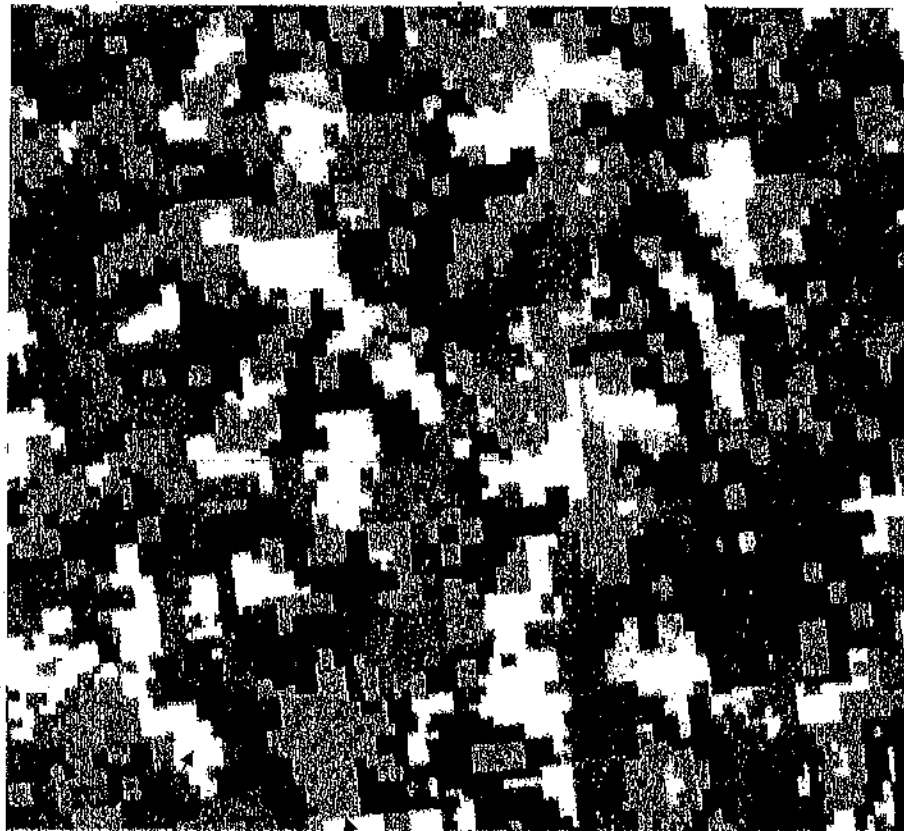
- i) If  $\Delta E_{cmc}$  is less than or equal to 3.0, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3.0, the sample is unacceptable.

Note-1 : Absorbance/reflectance/transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.


  
 CISF      ITBP      BSF      2102      NSG      SSB      JAF

# INDO TIBETAN BORDER POLICE FORCE STANDARD



Khaki  
Table-4A

Green  
Table-4B

Black  
Table-4D

Brown  
Table-4C

## SPECIFICATION FOR COLOUR CODE OF CLOTH DISRUPTIVE PATTERN (ANO)

*[Signature]*  
CISF

*[Signature]*  
ITBP

*[Signature]*  
BSF

*[Signature]*  
NSG

*[Signature]*  
SSB

*[Signature]*  
CRPF

23 23

ITBP

**Table-4A: Colour Specification of Cloth Disruptive (ANO Pattern)-Khaki**  
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour	:	KHAKI		
System	:	CIE LCH		
Illuminant Observer	:	D-65		
Standard Observer	:	10 Degree		
Tristimulus Values	:	X	Y	Z
		22.115	23.558	15.980
LCH	:	L	C	H
		55.643	17.559	93.264
CMC (l:c)	:	2:1		
Colour Difference, $\Delta E_{cmc}$	:	$\leq 3.0$		

**Interpretation of Results:**

- i) If  $\Delta E_{cmc}$  is less than or equal to 3, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.

GSF      ITBP      BSF      AR      NSG      SSB      CRPF

(26) (24)

ITBP

**Table-4B: Colour Specification of Cloth Disruptive (ANO Pattern)-Green**  
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour	:	GREEN						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>8.942</td> <td>10.059</td> <td>6.062</td> </tr> </tbody> </table>	X	Y	Z	8.942	10.059	6.062
X	Y	Z						
8.942	10.059	6.062						
LCH	:	<table border="1"> <thead> <tr> <th>L</th> <th>C</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>37.948</td> <td>17.013</td> <td>106.828</td> </tr> </tbody> </table>	L	C	H	37.948	17.013	106.828
L	C	H						
37.948	17.013	106.828						
CMC (l:c)	:	2:1						
Colour Difference, $\Delta E_{cmc}$	:	$\leq 3.0$						

**Interpretation of Results:**

- i) If  $\Delta E_{cmc}$  is less than or equal to 3.0, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3.0, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.

*[Signature]*  
CISF

*[Signature]*  
ITBP.

*[Signature]*  
BSF

*[Signature]*  
RPR<sup>24</sup>

*[Signature]*  
NSG

*[Signature]*  
SSB

*[Signature]*  
CISF

24 25

ITBP

**Table-4C : Colour Specification of Cloth Disruptive (ANO Pattern)-Brown Colour**  
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)


Colour	:	BROWN		
System	:	CIE LCH		
Illuminant Observer	:	D-65		
Standard Observer	:	10 Degree		
Tristimulus Values	:	X	Y	Z
		5.399	5.160	3.688
LCH	:	L	C	H
		27.186	11.318	56.538
CMC (1:c)	:	2:1		
Colour Difference, $\Delta E_{cmc}$	:	$\leq 3.0$		


**Interpretation of Results:**

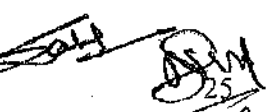
- iii) If  $\Delta E_{cmc}$  is less than or equal to 3.0, then sample is acceptable.
- iv) If  $\Delta E_{cmc}$  is greater than 3.0, the sample is unacceptable.

Note-1 : Absorbance/reflectance/transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/fibre composition.


Note-2: Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.

  
CISF


  
ITBP

  
BSF

  
AR

  
NSS

  
SSB

  
CRPF

**Table-4D : Colour Specification of Cloth Disruptive (ANO Pattern)-Black Colour**  
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour : BLACK

System : CIE LCH

Illuminant Observer : D-65

Standard Observer : 10 Degree

Tristimulus Values	X	Y	Z
	3.353	3.428	3.156

LCH	L	C	H
	21.682	3.670	62.153

CMC (1:c) : 2:1

Colour Difference,  $\Delta E_{cmc}$  :  $\leq 3.0$

**Interpretation of Results:**

- iii) If  $\Delta E_{cmc}$  is less than or equal to 3, then sample is acceptable.
- iv) If  $\Delta E_{cmc}$  is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/reflectance/transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.

*[Signature]*  
G/SF

*[Signature]*  
ITBP

*[Signature]*  
BSF

*[Signature]*  
M/S

*[Signature]*  
NSG

*[Signature]*  
SSB

*[Signature]*  
C/SF


39 27


# SASHASTRA SEEMA BAL (SSB)





COLOUR SPECIFICATION:  
ACCORDING TO SSB CLOTH I.FCD (REGULAR) PATTERN

  
CISF

  
ITBP

  
BSF

  
Ass 27

  
NSG

  
SSB

  
CRPF

CENTRAL RESERVE POLICE FORCE (CRPF)



GREEN  
TABLE-5A

BROWN  
TABLE-5B

KHAKI  
TABLE-5C

**Disruptive Print-Colour Specification for CRPF**

*[Signature]*  
CISF

*[Signature]*  
ITBP

*[Signature]*  
BSF

*[Signature]*  
AR 28

*[Signature]*  
NSG

*[Signature]*  
SSB

*[Signature]*  
CRPF



**Table-5A: Specification of colour Disruptive Pattern-Green**  
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

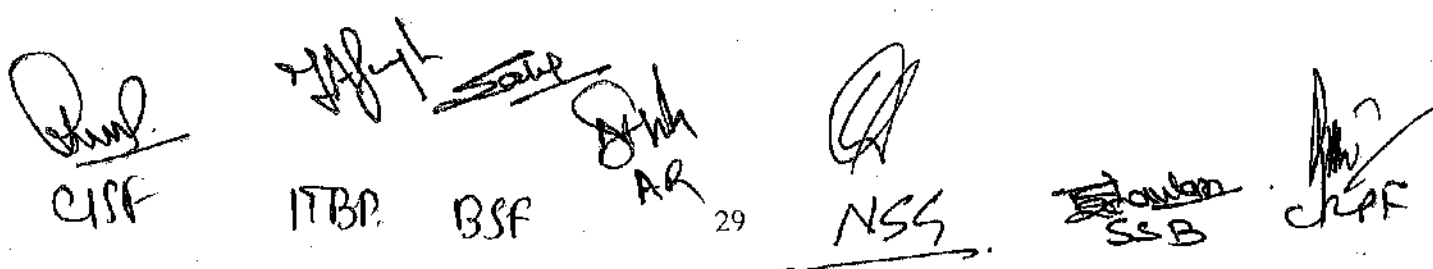
Colour	:	Green						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1"> <tr> <td>X</td> <td>Y</td> <td>Z</td> </tr> <tr> <td>4.385</td> <td>4.766</td> <td>3.826</td> </tr> </table>	X	Y	Z	4.385	4.766	3.826
	X	Y	Z					
4.385	4.766	3.826						
LCH	:	<table border="1"> <tr> <td>L</td> <td>C</td> <td>H</td> </tr> <tr> <td>26.057</td> <td>6.933</td> <td>104.977</td> </tr> </table>	L	C	H	26.057	6.933	104.977
	L	C	H					
26.057	6.933	104.977						
CMC (l:c)	:	2:1						
Colour Difference, $\Delta E_{cmc}$	:	$\leq 3.0$						

Interpretation of Results:

- i) If  $\Delta E_{cmc}$  is less than or equal to 3, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.


  
 C/SF      ITBP      BSF      AR      NSG      SSB      CRPF

**Table-5B: Specification of colour Disruptive Pattern-Brown**  
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour	:	<b>Brown</b>							
System	:	CIE LCH							
Illuminant Observer	:	D-65							
Standard Observer	:	10 Degree							
Tristimulus Values	:	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr> <td style="width: 33%;">X</td> <td style="width: 33%;">Y</td> <td style="width: 33%;">Z</td> </tr> <tr> <td>5.262</td> <td>5.192</td> <td>4.030</td> </tr> </table>		X	Y	Z	5.262	5.192	4.030
X	Y	Z							
5.262	5.192	4.030							
LCH	:	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr> <td style="width: 33%;">L</td> <td style="width: 33%;">C</td> <td style="width: 33%;">H</td> </tr> <tr> <td>27.275</td> <td>8731</td> <td>61.138</td> </tr> </table>		L	C	H	27.275	8731	61.138
L	C	H							
27.275	8731	61.138							
CMC (l:c)	:	2:1							
Colour Difference, $\Delta E_{cmc}$	:	$\leq 3.0$							

**Interpretation of Results:**

- i) If  $\Delta E_{cmc}$  is less than or equal to 3, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.

**Table-5C: Specification of colour Disruptive Pattern-Khaki**  
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

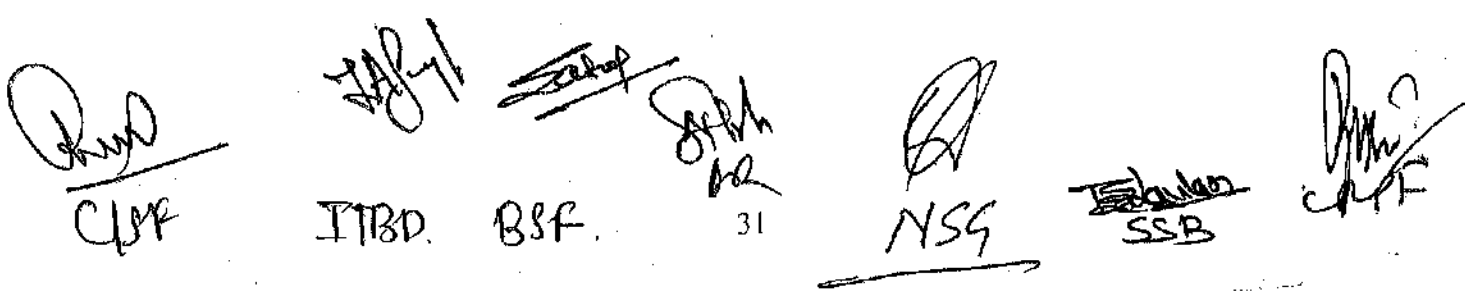
Colour	:	Khaki						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1"> <tr> <td>X</td> <td>Y</td> <td>Z</td> </tr> <tr> <td>19.478</td> <td>19.974</td> <td>12.295</td> </tr> </table>	X	Y	Z	19.478	19.974	12.295
	X	Y	Z					
19.478	19.974	12.295						
LCH	:	<table border="1"> <tr> <td>L</td> <td>C</td> <td>H</td> </tr> <tr> <td>51.808</td> <td>19.983</td> <td>81.959</td> </tr> </table>	L	C	H	51.808	19.983	81.959
	L	C	H					
51.808	19.983	81.959						
CMC (1:c)	:	2:1						
Colour Difference, $\Delta E_{cmc}$	:	$\leq 3.0$						

**Interpretation of Results:**

- i) If  $\Delta E_{cmc}$  is less than or equal to 3, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3, the sample is unacceptable.

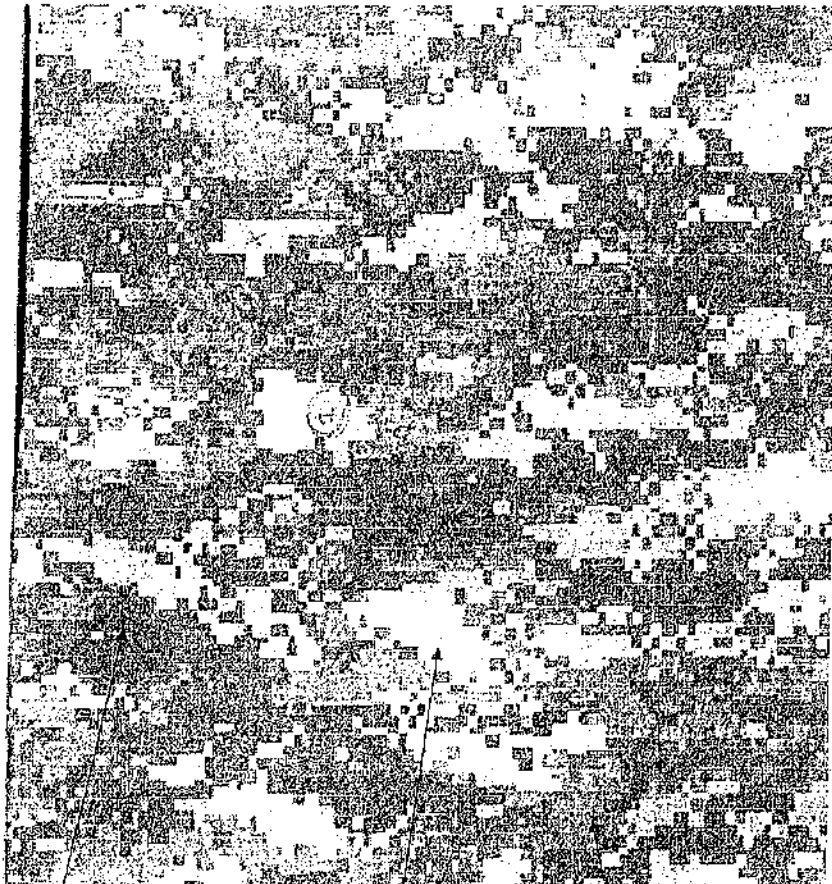
Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.


  
 Quid CRP      ITBD      BSR      NSG      SSB      CRPF

# CoBRA (CRPF)

## Disruptive Print-Colour Specification for CoBRA, CRPF





Dark Green  
TABLE-6A


Khaki  
TABLE-6C


Light Green  
TABLE-6B


Fig. 2 : Disruptive Print -LIGHT COLOUR (For colour identification only)


  
 QSF


  
 ITBP

  
 BSF

  
 32

  
 NSG

  
 SSB

  
 CRPF

CoBRA (CRPF)

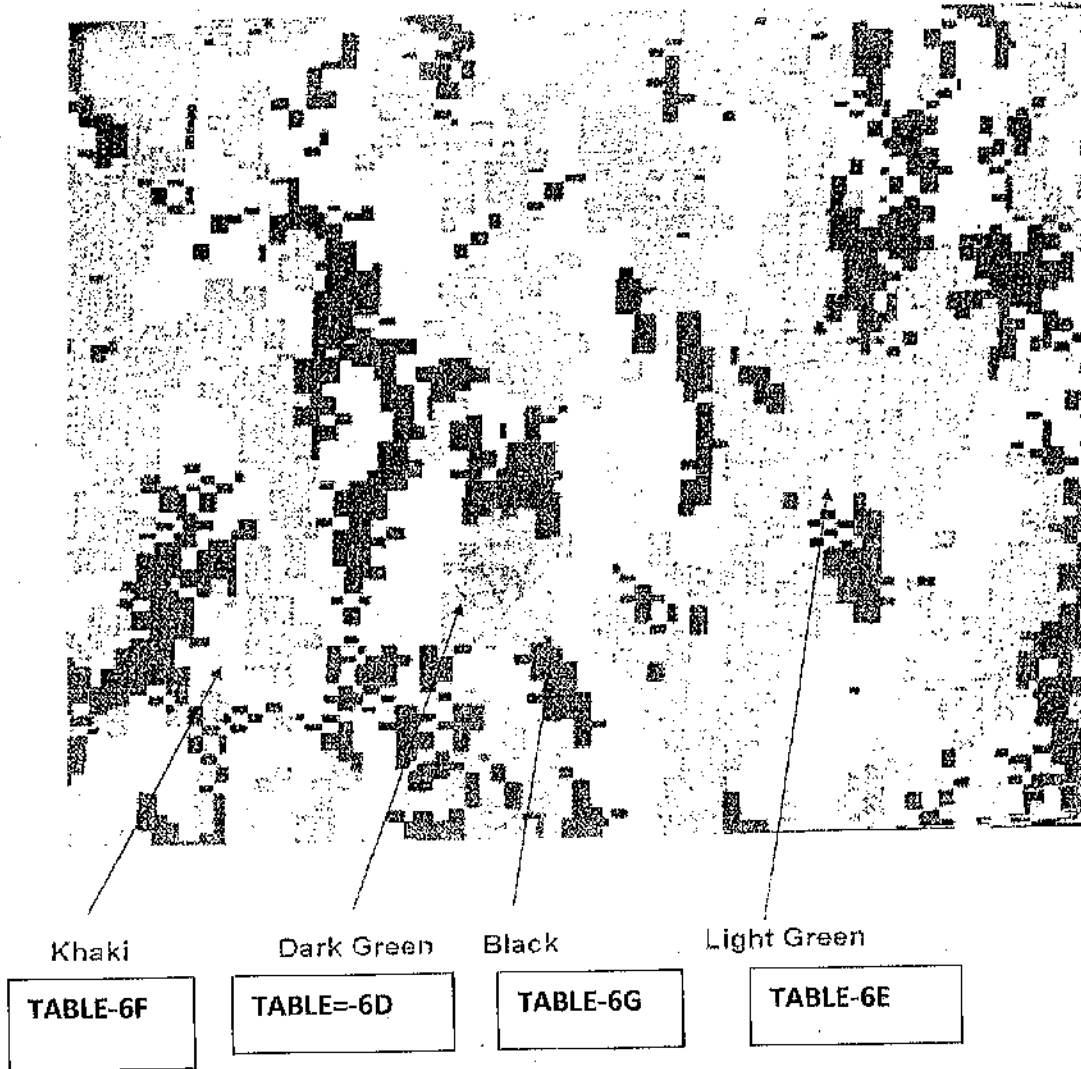







Fig. 3 Disruptive Print -DARK COLOUR (For colour identification only)


  
 QSF


  
 ITBR

  
 BSF

  
 NR

  
 NSG

  
 SSB

  
 CRPF

33

CoBRA (CRPF)

TABLE-6(A-C): DISRUPTIVE PRINT-LIGHT COLOUR  
Table-6A: Specification of colour Disruptive Pattern –Dark Green  
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

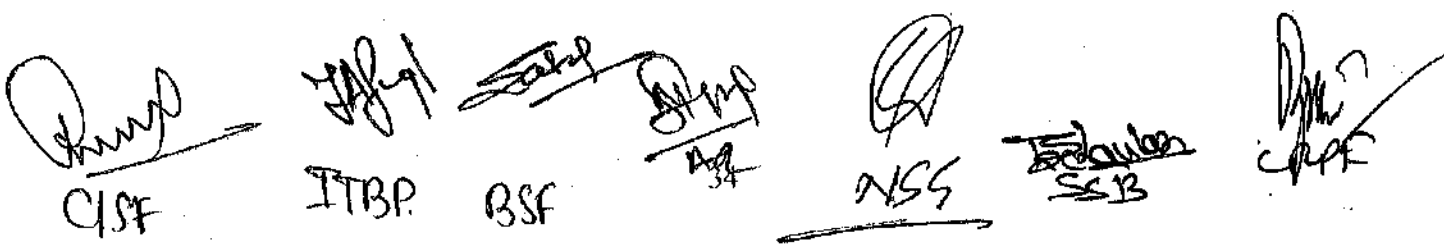
Colour	:	Dark Green						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>12.113</td> <td>13.044</td> <td>12.675</td> </tr> </tbody> </table>	X	Y	Z	12.113	13.044	12.675
X	Y	Z						
12.113	13.044	12.675						
LCH	:	<table border="1"> <thead> <tr> <th>L</th> <th>C</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>42.829</td> <td>3.739</td> <td>117.481</td> </tr> </tbody> </table>	L	C	H	42.829	3.739	117.481
L	C	H						
42.829	3.739	117.481						
CMC (l:c)	:	2:1						
Colour Difference, $\Delta E_{cmc}$	:	$\leq 3.0$						

Interpretation of Results:

- iii) If  $\Delta E_{cmc}$  is less than or equal to 3, then sample is acceptable.
- iv) If  $\Delta E_{cmc}$  is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.


  
 C/SF      ITBP      BSF      ~~NSG~~      NSG      ~~NSG~~      CRPF

**CoBRA (CRPF)**

**Table-6B: Specification of colour Disruptive Pattern (Light Colour)-Light Green**  
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour	:	Light Green						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table style="width: 100%; border-collapse: collapse; margin: 0 auto;"> <thead> <tr> <th style="width: 33.33%; text-align: center;">X</th> <th style="width: 33.33%; text-align: center;">Y</th> <th style="width: 33.33%; text-align: center;">Z</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">19.319</td> <td style="text-align: center;">20.577</td> <td style="text-align: center;">18.966</td> </tr> </tbody> </table>	X	Y	Z	19.319	20.577	18.966
X	Y	Z						
19.319	20.577	18.966						
LCH	:	<table style="width: 100%; border-collapse: collapse; margin: 0 auto;"> <thead> <tr> <th style="width: 33.33%; text-align: center;">L</th> <th style="width: 33.33%; text-align: center;">C</th> <th style="width: 33.33%; text-align: center;">H</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">52.783</td> <td style="text-align: center;">5.930</td> <td style="text-align: center;">99.085</td> </tr> </tbody> </table>	L	C	H	52.783	5.930	99.085
L	C	H						
52.783	5.930	99.085						
CMC (l:c)	:	2:1						
Colour Difference, $\Delta E_{cmc}$	:	$\leq 3.0$						

**Interpretation of Results:**

- i) If  $\Delta E_{cmc}$  is less than or equal to 3, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 : Test should be carried out after proper conditioning as per AATCC 173.

**CoBRA (CRPF)**

**Table-6C: Specification of colour Disruptive Pattern (Light Colour)-Khaki**  
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour	:	Khaki	
System	:	CIE LCH	
Illuminant Observer	:	D-65	
Standard Observer	:	10 Degree	
Tristimulus Values	:	X	Y
		Z	
		31.643	32.716
		28.306	
LCH	:	L	C
		H	
		63.930	9.848
		76.272	
CMC (l:c)	:	2:1	
Colour Difference, $\Delta E_{cmc}$	:	$\leq 3.0$	

**Interpretation of Results:**

- i) If  $\Delta E_{cmc}$  is less than or equal to 3, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.



**TABLE-6(D-G): DISRUPTIVE PRINT-DARK COLOUR**

**Table-6D: Specification of colour Disruptive Pattern (Dark Colour)-DARK GREEN COLOUR**

(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour	:	Dark Green						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%; text-align: center;">X</td> <td style="width: 33%; text-align: center;">Y</td> <td style="width: 33%; text-align: center;">Z</td> </tr> <tr> <td style="text-align: center;">5.234</td> <td style="text-align: center;">5.964</td> <td style="text-align: center;">4.813</td> </tr> </table>	X	Y	Z	5.234	5.964	4.813
		X	Y	Z				
5.234	5.964	4.813						
LCH	:	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%; text-align: center;">L</td> <td style="width: 33%; text-align: center;">C</td> <td style="width: 33%; text-align: center;">H</td> </tr> <tr> <td style="text-align: center;">29.321</td> <td style="text-align: center;">8.650</td> <td style="text-align: center;">124.923</td> </tr> </table>	L	C	H	29.321	8.650	124.923
		L	C	H				
29.321	8.650	124.923						
CMC (l:c)	:	2:1						
Colour Difference, $\Delta E_{cmc}$	:	$\leq 3.0$						

**Interpretation of Results:**

- i) If  $\Delta E_{cmc}$  is less than or equal to 3, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.

40 38

**CoBRA (CRPF)**

**Table-6E: Specification of colour Disruptive Pattern (Dark Colour)-LIGHT GREEN COLOUR**

(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour	:	Light Green						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>13.838</td> <td>14.418</td> <td>11.139</td> </tr> </tbody> </table>	X	Y	Z	13.838	14.418	11.139
X	Y	Z						
13.838	14.418	11.139						
LCH	:	<table border="1"> <thead> <tr> <th>L</th> <th>C</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>44.827</td> <td>10.951</td> <td>84.217</td> </tr> </tbody> </table>	L	C	H	44.827	10.951	84.217
L	C	H						
44.827	10.951	84.217						
CMC (l:c)	:	2:1						
Colour Difference, $\Delta E_{cmc}$	:	$\leq 3.0$						

**Interpretation of Results:**

- i) If  $\Delta E_{cmc}$  is less than or equal to 3, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.

CoBRA (CRPF)

Table-6F: Specification of colour Disruptive Pattern (Dark Colour)-KHAKE COLOUR

(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour : Khaki

System : CIE LCH

Illuminant Observer : D-65

Standard Observer : 10 Degree

Tristimulus Values	X	Y	Z
	10.410	10.217	6.302

LCH	L	C	H
	38.229	16.771	70.096

CMC (1:c) : 2:1

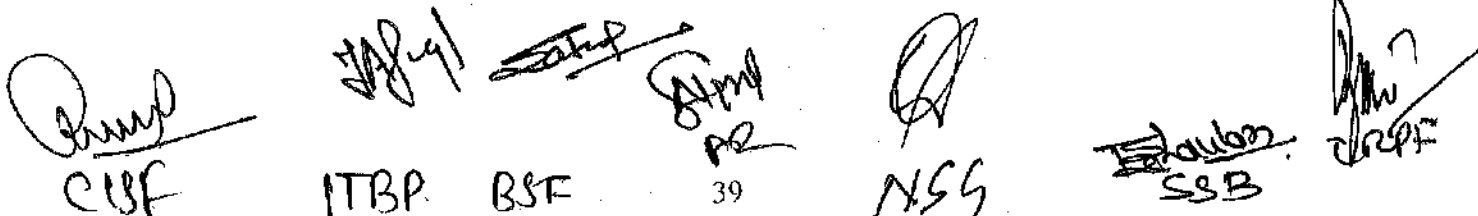
Colour Difference,  $\Delta E_{cmc}$  :  $\leq 3.0$

Interpretation of Results:

- i) If  $\Delta E_{cmc}$  is less than or equal to 3, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.


  
 CBF      ITBP      BSE      39      NSS      SSB      CRPF

(42) (40)

**CoBRA (CRPF)**

**Table-6G: Specification of colour Disruptive Pattern (Dark Colour)-BLACK COLOUR**

(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour	:	Black						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%; text-align: center;">X</td> <td style="width: 33%; text-align: center;">Y</td> <td style="width: 33%; text-align: center;">Z</td> </tr> <tr> <td style="text-align: center;">2.294</td> <td style="text-align: center;">2.393</td> <td style="text-align: center;">2.994</td> </tr> </table>	X	Y	Z	2.294	2.393	2.994
		X	Y	Z				
2.294	2.393	2.994						
LCH	:	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%; text-align: center;">L</td> <td style="width: 33%; text-align: center;">C</td> <td style="width: 33%; text-align: center;">H</td> </tr> <tr> <td style="text-align: center;">17.428</td> <td style="text-align: center;">3.064</td> <td style="text-align: center;">280.297</td> </tr> </table>	L	C	H	17.428	3.064	280.297
		L	C	H				
17.428	3.064	280.297						
CMC (1:c)	:	2:1						
Colour Difference, $\Delta E_{cmc}$	:	$\leq 3.0$						

**Interpretation of Results:**

- i) If  $\Delta E_{cmc}$  is less than or equal to 3, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3, the sample is unacceptable.

**Note-1 :** Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

**Note-2** Test should be carried out after proper conditioning as per AATCC 173.

*[Signature]*  
CISF

*[Signature]*  
ITBP      BSF

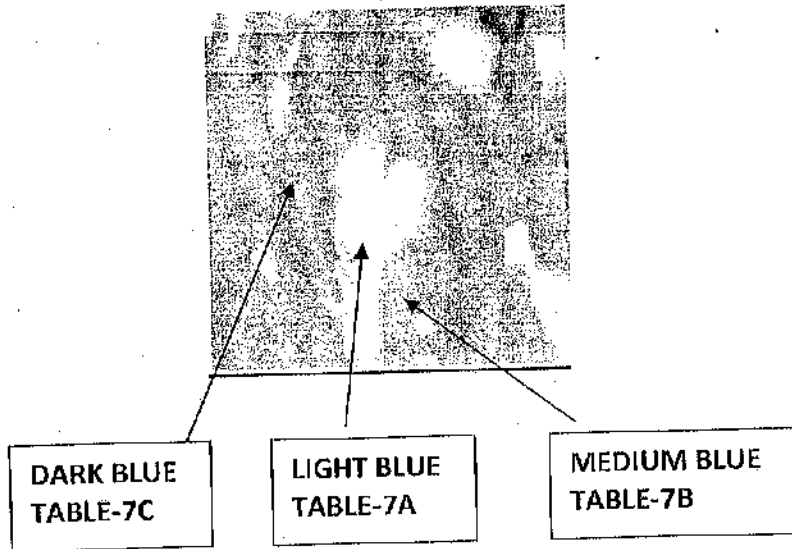
*[Signature]*  
AR

*[Signature]*  
NSG

*[Signature]*  
SSB

*[Signature]*  
CRPF

RAPID ACTION FORCE(RAF), CRPF



**COLOUR SPECIFICATION OF DISRUPTIVE PATTERN  
RAF, CRPF**

Prasad  
CISF

Yash  
ITBP

Sanjay  
BSF

Prakash  
AR

NSG

Shankar  
SSB

Prakash  
CRPF

440 42

RAF, CRPF

Table-7A: Colour Specification of Cloth Disruptive Pattern-Light Blue  
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour	:	Light Blue						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>23.673</td> <td>25.605</td> <td>45.514</td> </tr> </tbody> </table>	X	Y	Z	23.673	25.605	45.514
X	Y	Z						
23.673	25.605	45.514						
LCH	:	<table border="1"> <thead> <tr> <th>L</th> <th>C</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>57.660</td> <td>23.383</td> <td>263.32</td> </tr> </tbody> </table>	L	C	H	57.660	23.383	263.32
L	C	H						
57.660	23.383	263.32						
CMC (l:c)	:	2:1						
Colour Difference, $\Delta E_{cmc}$	:	$\leq 3.0$						

Interpretation of Results:

- v) If  $\Delta E_{cmc}$  is less than or equal to 3, then sample is acceptable.
- vi) If  $\Delta E_{cmc}$  is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.

CIST      ITBP      BSF      NSS      SSB

**Table-7B: Colour Specification of Cloth Disruptive Pattern-Medium Blue**  
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

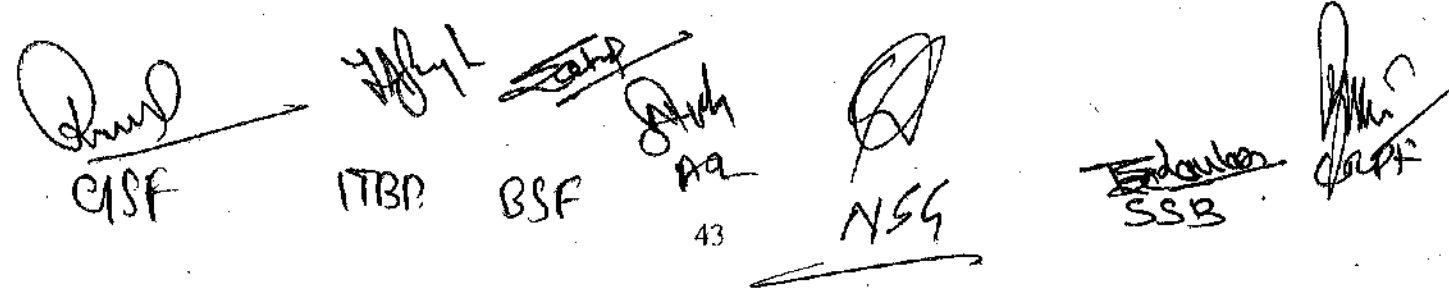
Colour	:	Medium Blue		
System	:	CIE LCH		
Illuminant Observer	:	D-65		
Standard Observer	:	10 Degree		
Tristimulus Values	:	X	Y	Z
		11.164	11.863	25.099
LCH	:	L	C	H
		40.998	24.040	268.623
CMC (l:c)	:	2:1		
Colour Difference, $\Delta E_{cmc}$	:	$\leq 3.0$		

**Interpretation of Results:**

- i) If  $\Delta E_{cmc}$  is less than or equal to 3, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.


  
 GSPF      ITBP      BSF      AA      NSG      SSB      CRPF

(46) (44)

# RAF, CRPF

**Table-7C: Colour Specification of Cloth Disruptive Pattern-Dark Blue**  
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

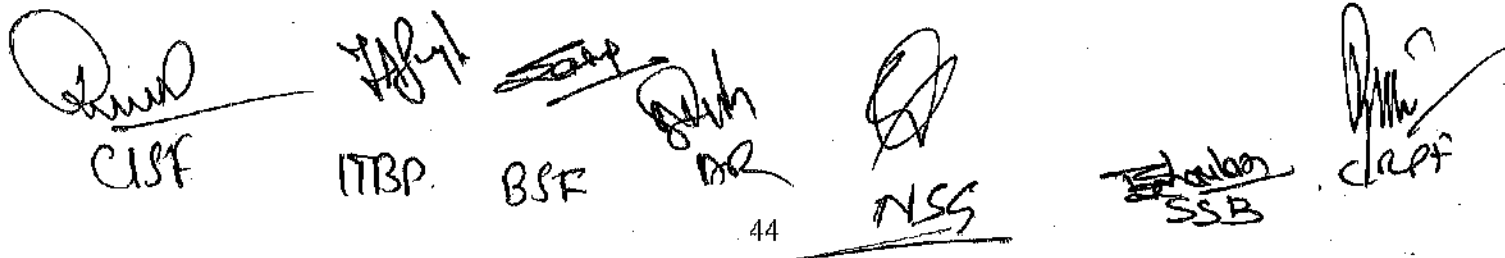
Colour	:	Dark Blue		
System	:	CIE LCH		
Illuminant Observer	:	D-65		
Standard Observer	:	10 Degree		
Tristimulus Values	:	X	Y	Z
		3.878	3.905	9.061
LCH	:	L	C	H
		23.355	20.051	277.651
CMC (l:c)	:	2:1		
Colour Difference, $\Delta E_{cmc}$	:	$\leq 3.0$		

**Interpretation of Results:**

- i) If  $\Delta E_{cmc}$  is less than or equal to 3, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.


  
 CISF      ITBP      BSR      DR      NSS      SSB      CRPF



# VIP Security, CRPF

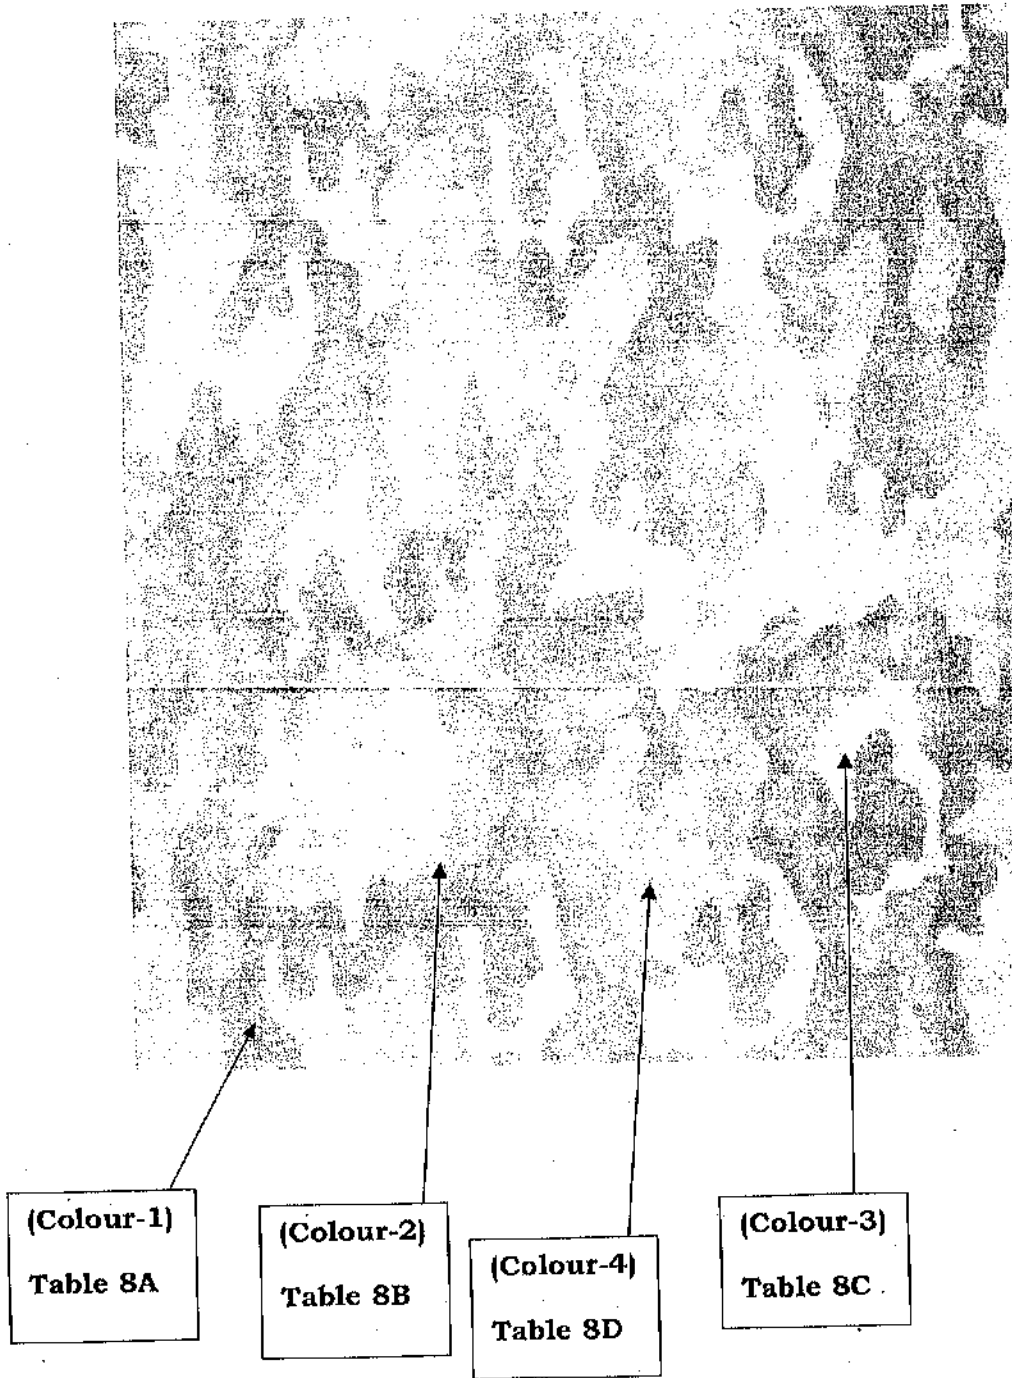


Fig. : Disruptive Print (For colour identification only)

## COLOUR SPECIFICATION OF DISRUPTIVE PATTERN

### VIP Security, CRPF

*[Signature]*  
CISF

*[Signature]*  
ITBP

*[Signature]*  
BSF  
*[Signature]*  
AR

*[Signature]*  
NSG


*[Signature]*  
SSB

*[Signature]*  
CRPF

48 46

VIP Security, CRPF

**TABLE 8A (Fig. ) Specification of colour of Cloth disruptive-Colour-1**  
 (AATCC Test method 173 : 2009 & AATCC Evaluation Procedure 7 : 2009)






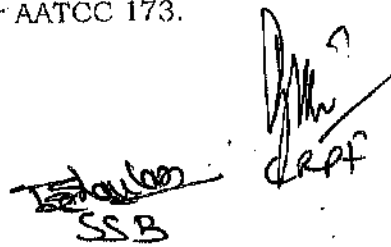
<b>Colour</b>	:		<b>Colour-1</b>					
<b>System</b>	:	<b>CIE LCH</b>						
<b>Illuminant Observer</b>	:	<b>D 65</b>						
<b>Standard Observer</b>	:	<b>10 Degree</b>						
<b>Tristimulus Values</b>	:	<table border="1"> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td>9.273</td> <td>9.878</td> <td>10.216</td> </tr> </table>	X	Y	Z	9.273	9.878	10.216
X	Y	Z						
9.273	9.878	10.216						
<b>LCH</b>	:	<table border="1"> <tr> <th>L</th> <th>C</th> <th>H</th> </tr> <tr> <td>37.623</td> <td>1.364</td> <td>122.874</td> </tr> </table>	L	C	H	37.623	1.364	122.874
L	C	H						
37.623	1.364	122.874						
<b>CMC (l:c)</b>	:	<b>2:1</b>						
<b>Colour difference, <math>\Delta E_{cmc}</math></b>	:	<b><math>\leq 3.0</math></b>						

**Interpretation of Results:**

- i) If  $\Delta E_{cmc}$  is less than or equal to 3.0, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3.0, then sample is unacceptable.

**Note-1 :** Absorbance/reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between samples of same type i.e., identical fabric construction parameters and filament/ fibre composition.

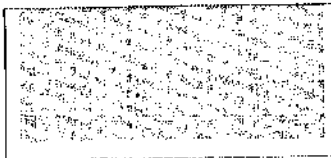
**Note-2 :** Test should be carried out after proper conditioning as per AATCC 173.

 CIST    
  ITBP    
  BSF    
  NSG    
  SSB    
  CRPF

(49) (47)

**VIP Security, CRPF**

**TABLE 8B (Fig.) Specification of colour of Cloth disruptive-Colour-2**  
(AATCC Test method 173 : 2009 & AATCC Evaluation Procedure 7 : 2009)

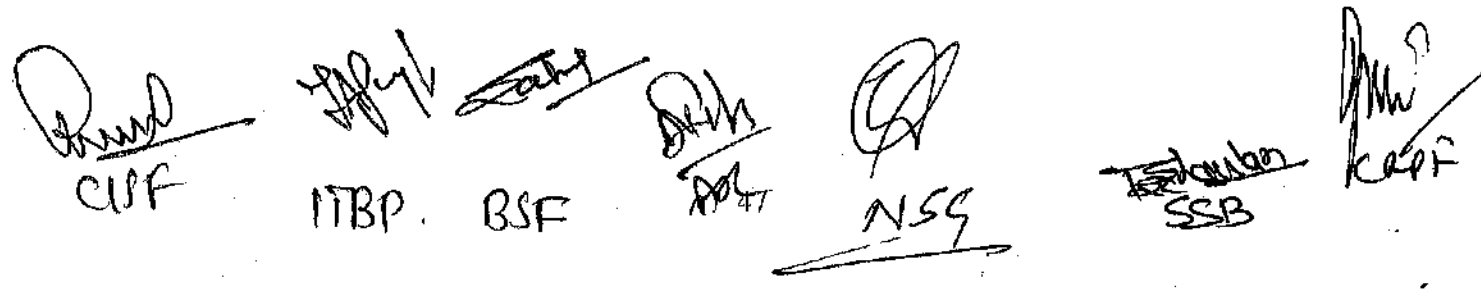
<b>Colour</b>		<b>Colour-2</b>						
								
<b>System</b>		CIE LCH						
<b>Illuminant Observer</b>		D 65						
<b>Standard Observer</b>		10 Degree						
<b>Tristimulus Values</b>		<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr> <td style="width: 33%;">X</td> <td style="width: 33%;">Y</td> <td style="width: 33%;">Z</td> </tr> <tr> <td>13.127</td> <td>14.041</td> <td>14.564</td> </tr> </table>	X	Y	Z	13.127	14.041	14.564
X	Y	Z						
13.127	14.041	14.564						
<b>LCH</b>		<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr> <td style="width: 33%;">L</td> <td style="width: 33%;">C</td> <td style="width: 33%;">H</td> </tr> <tr> <td>44.292</td> <td>1.679</td> <td>134.946</td> </tr> </table>	L	C	H	44.292	1.679	134.946
L	C	H						
44.292	1.679	134.946						
<b>CMC (1:c)</b>		2:1						
<b>Colour difference, <math>\Delta E_{cmc}</math></b>		$\leq 3.0$						

**Interpretation of Results:**

- i) If  $\Delta E_{cmc}$  is less than or equal to 3.0, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3.0, then sample is unacceptable.

**Note-1 :** Absorbance/reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between samples of same type i.e., identical fabric construction parameters and filament/ fibre composition.

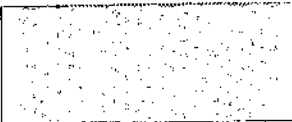
**Note-2 :** Test should be carried out after proper conditioning as per AATCC 173.



(50) (48)

### VIP Security, CRPF

**TABLE 8C (Fig. ) Specification of colour of Cloth disruptive-Colour-3**  
(AATCC Test method 173 : 2009 & AATCC Evaluation Procedure 7 : 2009)

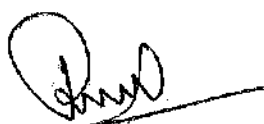




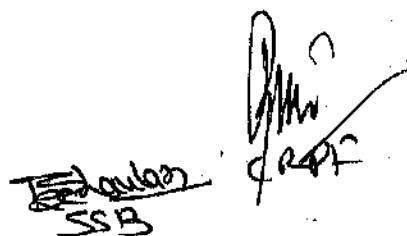
<b>Colour</b>	:		<b>Colour-3</b>					
<b>System</b>	:	<b>CIE LCH</b>						
<b>Illuminant Observer</b>	:	<b>D 65</b>						
<b>Standard Observer</b>	:	<b>10 Degree</b>						
<b>Tristimulus Values</b>	:	<table border="1"> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td>19.156</td> <td>20.574</td> <td>2.355</td> </tr> </table>	X	Y	Z	19.156	20.574	2.355
X	Y	Z						
19.156	20.574	2.355						
<b>L C H</b>	:	<table border="1"> <tr> <th>L</th> <th>C</th> <th>H</th> </tr> <tr> <td>52.480</td> <td>1.810</td> <td>195.074</td> </tr> </table>	L	C	H	52.480	1.810	195.074
L	C	H						
52.480	1.810	195.074						
<b>CMC (l:c)</b>	:	<b>2:1</b>						
<b>Colour difference, <math>\Delta E_{cmc}</math></b>	:	<b><math>\leq 3.0</math></b>						

**Interpretation of Results:**

- i) If  $\Delta E_{cmc}$  is less than or equal to 3.0, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3.0, then sample is unacceptable.

**Note-1 :** Absorbance/reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between samples of same type i.e., identical fabric construction parameters and filament/ fibre composition.

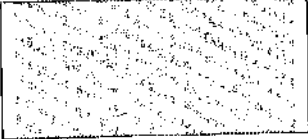
**Note-2 :** Test should be carried out after proper conditioning as per AATCC 173.

 CBF    
  ITBP    
  BSF    
  NSG    
  SSB    
  CRPF

51 49

VIP Security, CRPF

TABLE 8 D (Fig.) Specification of colour of Cloth disruptive  
(AATCC Test method 173 : 2009 & AATCC Evaluation Procedure 7 : 2009)





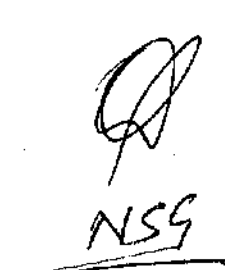
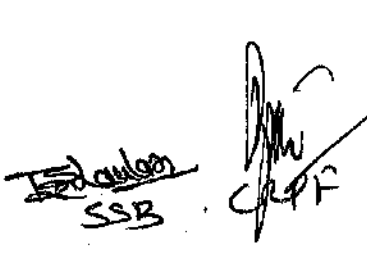
Colour	:	 Colour-4						
System	:	CIE LCH						
Illuminant Observer	:	D 65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1"> <tr> <td>X</td> <td>Y</td> <td>Z</td> </tr> <tr> <td>15.951</td> <td>17.234</td> <td>18.920</td> </tr> </table>	X	Y	Z	15.951	17.234	18.920
X	Y	Z						
15.951	17.234	18.920						
LCH	:	<table border="1"> <tr> <td>L</td> <td>C</td> <td>H</td> </tr> <tr> <td>48.554</td> <td>2.347</td> <td>200.673</td> </tr> </table>	L	C	H	48.554	2.347	200.673
L	C	H						
48.554	2.347	200.673						
CMC (l:c)	:	2:1						
Colour difference, $\Delta E_{cmc}$	:	$\leq 3.0$						

Interpretation of Results:

- i) If  $\Delta E_{cmc}$  is less than or equal to 3.0, then sample is acceptable.
- ii) If  $\Delta E_{cmc}$  is greater than 3.0, then sample is unacceptable.

**Note-1** : Absorbance/reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between samples of same type i.e., identical fabric construction parameters and filament/ fibre composition.

**Note-2** : Test should be carried out after proper conditioning as per AATCC 173.

 CSF    
  ITBP    
  BSF    
  NSG    
  SSB    
  CRPF

**Number of T-Shirts to be selected from a lot and permissible number of Non-conforming T-Shirts**

No. of the T-Shirt in the lot	Non-destructive Testing		Non-destructive Testing	
	Number of the T-Shirt to be selected	Number of the T-Shirt to be selected	Number of T-Shirts to be selected	Permissible Number of Non-conforming T-Shirts
(1)	(2)	(3)	(4)	(5)
Up to 300	10	1	2	0
301-500	20	1	3	0
501-1000	30	2	5	0
1001-3000	50	3	8	0
3001 and above	80	5	13	1

  
A/Rif

  
BSF

  
CISF

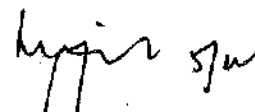
  
CRPF

  
ITBP

  
SSB

  
NSG

  
Anupam Kulshreshtha, IPS, IG(Prov), CRPF

  
Rajeev Rai Bhatnagar, IPS  
BG CRPF