

Director General CRPF
Block No. 1 CGO Complex, New Delhi-110003
(Govt. of India/Ministry of Home Affairs)
(Phone / Fax- 011-24360155)
(E-Mail- digprov@crpf.gov.in)

No.U.II-98(Spec)/2017-18-Prov-(T-Shirt)

Dated, the 7 December 2018

To

The DsG: AR, BSF, CISF, ITBP, NSG, SSB and BPRD


Subject: Revised QRs/Specification of "T-Shirt Half Sleeves Round Neck Disruptive Pattern" for CAPFs.

This is with reference to BSF letter No. 401/Prov-CTS(NC)/BSF/SPN/T-Shirt Round Neck/2013/1519-23 dated 28/08/2015 regarding proposal for revision of QRs/Specification of "T-Shirt Half Sleeves Round Neck Disruptive Pattern" that was approved vide MHA letter U-II-98(Spec)2013-14-Prov-1166 dated 26/11/2013 and to say that revised QRs/Specification has been finalized by Sub-Group of CAPFs and further approved by Competent Authority.

2. Henceforth, all the CAPFs may procure the above item required by them, strictly as per the laid down revised QRs/Specification. The earlier QRs/Specification of T-Shirt Round Neck Disruptive Pattern approved vide MHA letter No. U-II-98(Spec)/2013-14-Prov-2013-14-Prov-1166 dated 26/11/2013 is rescinded.

3. This has the approval of DG, CRPF vide E-Office No. 144 dated 07/12/2018 (empowered vide MHA letter F.No. 11012/02/2009-Fin-I-17 dated 02/01/2018).

Encl: As above.



R.K. Thakur
DIG (Prov)

No.U.II-98(Spec)/2017-18-Prov-(T-Shirt)-14

Dated, the December 2018

Copy forwarded to:-

1. SO (IT), North Block-with request to upload the approved QRs/Specification of "T-Shirt Half Sleeves Round Neck Disruptive Pattern" to MHA Website. For information and necessary action please on his e-mail ID soit@nic.in
2. DIG(IT), Dte Genl., CRPF -with request to upload this approved QRs/Specification of "T-Shirt Half Sleeves Round Neck Disruptive Pattern" for CAPFs to CRPF Portal and Selo Module.


R.K. Thakur
DIG (Prov)

(3) (1)

QRs/ Specifications of "T-Shirt Half Sleeves Round Neck Disruptive Pattern"

1. **Applicability-** These specifications relate to the manufacturing details of the T-Shirt Half Sleeves Round Neck Disruptive Pattern (Regular & Green Pattern)

2. **Salient Features:**

The salient features of the garment are: **Poly-Cotton T-Shirt**

3. **Materials**

The materials used in the manufacture and packing of the T-Shirt shall conform to the following Standard Specifications:

The T-Shirt shall be manufactured out of well and evenly single jersey knitted fabric. The constructional details of the fabric are as given under. The knitted fabric shall not be overloaded or pulled in length while calendaring.

S. No.	Specifications	Requirement	Test Method*
1.	Fibre Identification/ Composition Except Neck For Neck (On Dry mass basis)	Cotton : 58 ± 3% Polyester : Remainder Cotton : 56 ± 3% Polyester : Remainder Elastane : 2% Min	AATCC 20:2011 and AATCC 20A:2012 IS: 667/AATC-20 AATCC-20-A/IS:3416
2.	Dimensional Stability	± 3.5% (Both directions), Maximum	IS 2977-1989
3.	Fabric Weight	200 ^l to 220 (g/m ²)	IS 1964 : 2001
4.	Colour Fastness to Rubbing	Dry: 3-4 or better Wet: 3-4 or better	IS 766-1988
5.	Colour Fastness to Light	4-5 or better (On blue wool)	IS 2454: 1985
6.	Colour Fastness to Washing	Change in Colour: 4 or better Staining on Cotton: 4 or better	IS/ISO 105 C 10 D (4): 2006
7.	Colour Fastness to Perspiration	4 or better	IS 971:1983
8.	Spirality after one Wash	4% Maximum	IS/ISO 16322-1: 2005 (Washing as per ISO 6330-5A at 40°C followed by flat dry)
9.	Banned Azo Colorants	30 mg per Kg, Maximum	IS 15570 : 2005
10.	pH Value of aqueous extract (Cold method)	6.0 to 8.5	IS 1390 : 1983
11.	Count per yarn, Ne	24's (for manufacturer's guidance)	IS:3442-1980
12.	Wales per Inch Course per Inch	32 Minimum 48 Minimum	Visual
13.	Type of Knit	Single Jersey (Plain Knit)	Visual

* Latest version of testing Method will be used.

(10) (2)

4. **Design** : The T-Shirt shall be round neck disruptive pattern (Regular & Green Pattern)

Portion to be stitched	Type of stitch	Thread in the Needles	Thread in the loopers
Round Neck – (Crew Neck) T-Shirt and armholes	Overlock & Flat Lock Stitches	80/120	80/120

Note: Ticket No. 80/120 Spun Polyester are used in the needles and loopers.

5. **Manufacture and Workmanship/ Operation:**

S.No.	Operation	Stitch Code	Needle Size	Thread Size	Machine Used
1.	Front & Back Shoulder Joining	514	11-Ball Point	80/120	Four Thread Overlock Machines
2.	Sleeve Joining	514	11-Ball Point	80/120	Four Thread Overlock Machines
3.	Side Seam Joining	514	11-Ball Point	80/120	Four Thread Overlock Machines
4.	Neck Rib Joining	514	11-Ball Point	80/120	Four Thread Overlock Machines
5.	Top Stitch on Neck Rib	406	11-Ball Point	80/120	Two Needles Flat Lock Machines with needle gauge 4mm
6.	Sleeve & Bottom Hemming	406	11-Ball Point	80/120	Two Needles Flat Lock Machines with needle gauge 8mm

Note: The number of stitches shall not be less than 12 stitches per inches.

6. **Shape and dimensions**

The T-Shirt shall confirm to the requirement given in (Annexure-A)

7. **Packaging**


S.No.	Materials	Dimension
1.	Re-Cycle Card-Board 300 gsm	26 cm x 22 cm
2.	Transparent Polybag (Printed on bag: Kindly dispose after used)	35 cm x 27 cm
3.	Plastic Packing Clip (U Shape)	4.0 cm x .7 cm x .3 cm
4.	Paper Strip/ Fabric Ribbon strip	If required
5.	Wash Care Label, Stamp-Ink on Center Back Neck	Standard Size 3 cm x 4 cm

Handwritten signatures and initials:
D. S. R. → J. T. B. P. B. S. P. (10) (2) N. S. G. S. S. B. C. P. P.

83

Annexure-A

MENS T-SHIRT

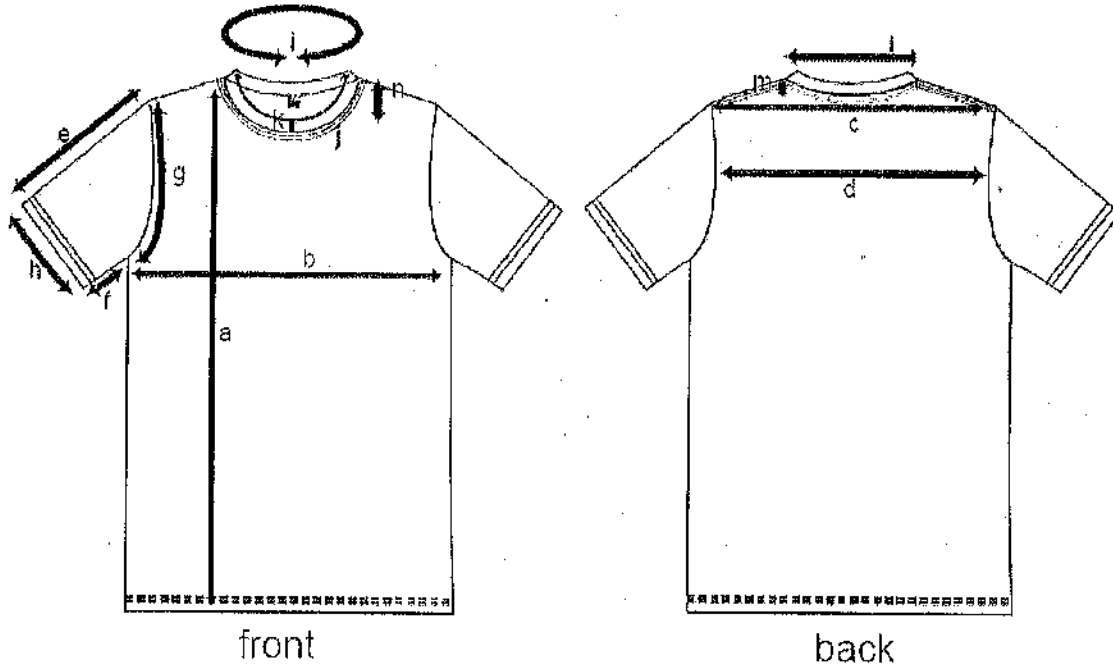

Size Specification of T-Shirt (half sleeves round neck)							Tolerance
Sl. No.	Size	Size in inches					
		S	M	L	XL	XXL	
a	length from (HSP)	28.5	29	29.5	30	31	±0.5
b	chest width round	40	42	44	46	48	±1.0
c	shoulder seam to seam	17.5	18	18.5	19	19.5	±0.25
d	across back 4" down from center back	16.5	17	17.5	18	18.5	±0.25
e	sleeve length	8.5	9	9.5	10	10.5	±0.25
f	inseam length	4	4.5	5	5.5	6	±0.25
g	arm hole curve round	19	20	21	22	23	±0.25
h	sleeve opening (round)	14	14	14.5	15	15.5	±0.25
i	neck rib round	17.5	18	18.5	19	19.5	±0.25
j	neck round on seam	23	23.5	24	24.5	25	±0.25
k	neck rib height	1	1	1	1	1	-
l	neck width shoulder seam to shoulder seam	7.75	8	8.25	8.5	8.75	±0.15
m	back neck drop	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	-
n	front neck drop	3	3	3	3	3	±0.15

Handwritten signatures and initials at the bottom of the page, including: CISF, JTB, BSE, NSG, SSB, and CRPF.

QRs/ Specifications of "T-Shirt Half Sleeves Round Neck Disruptive Pattern"

1. **Applicability-** These specifications relate to the manufacturing details of the T-Shirt Half Sleeves Round Neck Disruptive Pattern (Regular & Green Pattern)
2. **Salient Features:**

The salient features of the garment are: **100% Cotton T-Shirt**

3. **Materials**

The materials used in the manufacture and packing of the T-Shirt shall conform to the following Standard Specifications:

The T-Shirt shall be manufactured out of well and evenly single jersey knitted fabric. The constructional details of the fabric are as given under. The knitted fabric shall not be overloaded or pulled in length while calendaring.

S. No.	Specifications	Requirement	Test Method*
1.	Fibre Identification/ Composition Except Neck For Neck (On Dry mass basis)	Cotton : 100% Cotton : 97 % Max Elastane : Remainder (%)	AATCC 20:2011 and AATCC 20A:2012 IS: 667/AATC-20 AATCC-20-A/IS:3416
2.	Dimensional Stability	±3.5% (Both directions)	IS 2977-1989
3.	Fabric Weight	200 to 220 (g/m ²)	IS 1964 : 2001
4.	Colour Fastness to Rubbing	Dry: 3-4 or better Wet: 3-4 or better	IS 766-1988
5.	Colour Fastness to Light	4-5 or better	IS 2454: 1985
6.	Colour Fastness to Washing	Change in Colour: 4 or better Staining on Cotton: 4 or better	IS/ISO 105 C 10 D (4): 2006
7.	Colour Fastness to Perspiration	4 or better	IS 971:1983
8.	Spirality after one Wash	±4% Maximum	IS/ISO 16322-1: 2005 (Washing as per ISO 6330-2A at 60°C followed by flat dry)
9.	Banned Azo Colorants	30 mg per Kg, Maximum	IS 15570 : 2005
10.	pH Value of aqueous extract (Cold method)	6.0 to 8.5	IS 1390 : 1983
11.	Count per yarn, Ne	24's (for manufacturer's guidance)	IS:3442-1980
12.	Wales per Inch, Course per Inch,	32 Minimum 48 Minimum	Visual
13.	Type of Knit	Single Jersey (Plain Knit)	Visual

* Latest version of testing Method will be used.

(7) (5)

4. Design : The T-Shirt shall be round neck disruptive pattern (Regular & Green Pattern)

Portion to be stitched	Type of stitch	Thread in the Needles	Thread in the loopers
Round Neck – (Crew Neck) T-Shirt and armholes	Overlock & Flat Lock Stitches	80/120	80/120
Note: Ticket No. 80/120 Spun Polyester are used in the needles and loopers.			

5. Manufacture and Workmanship/ Operation:

S.No.	Operation	Stitch Code	Needle Size	Thread Size	Machine Used
1.	Front & Back Shoulder Joining	514	11-Ball Point	80/120	Four Thread Overlock Machines
2.	Sleeve Joining	514	11-Ball Point	80/120	Four Thread Overlock Machines
3.	Side Seam Joining	514	11-Ball Point	80/120	Four Thread Overlock Machines
4.	Neck Rib Joining	514	11-Ball Point	80/120	Four Thread Overlock Machines
5.	Top Stitch on Neck Rib	406	11-Ball Point	80/120	Two Needles Flat Lock Machines with needle gauge 4mm
6.	Sleeve & Bottom Hemming	406	11-Ball Point	80/120	Two Needles Flat Lock Machines with needle gauge 8mm

Note: The number of stitches shall not be less than 12 Stitch per inches.

6. Shape and dimensions

The T-Shirt shall conform to the requirement given in (Annexure-B)

7. Packaging


S.No.	Materials	Dimension
1.	Re-Cycle Card-Board 300 gsm	26cm x 22cm
2.	Transparent Polybag (Printed on bag: Kindly dispose after used)	35cm x 27cm
3.	Plastic Packing Clip (U Shape)	4.0 cm x .7 cm x .3 cm
4.	Paper Strip/ Fabric Ribbon strip	If required
5.	Wash Care Label, Stamp-Ink on Center Back Neck	Standard Size 3cm x 4cm

C/SF JTB BSF NSG SSB

② ⑥

Annexure-B

MENS T-SHIRT

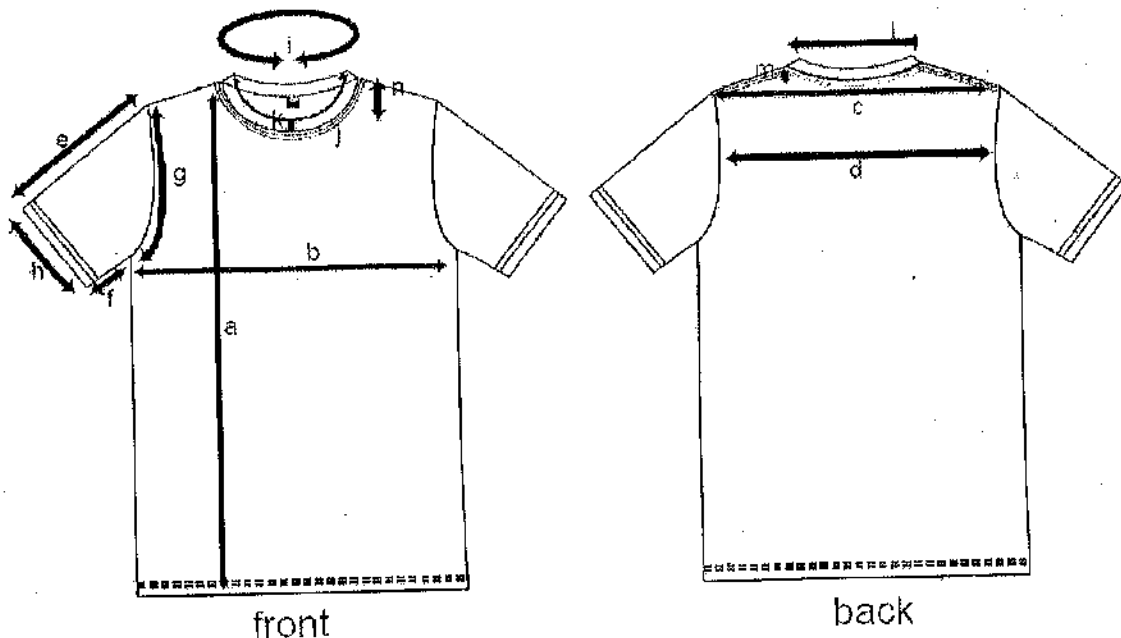

Size Specification of T-Shirt (half sleeves round neck)							Tolerance
Sl. No.	Size	Size in inches					
		S	M	L	XL	XXL	
a	length from (HSP)	28.5	29	29.5	30	31	±0.5
b	chest width round	40	42	44	46	48	±1.0
c	shoulder seam to seam	17.5	18	18.5	19	19.5	±0.25
d	across back 4" down from center back	16.5	17	17.5	18	18.5	±0.25
e	sleeve length	8.5	9	9.5	10	10.5	±0.25
f	inseam length	4	4.5	5	5.5	6	±0.25
g	arm hole curve round	19	20	21	22	23	±0.25
h	sleeve opening (round)	14	14	14.5	15	15.5	±0.25
i	neck rib round	17.5	18	18.5	19	19.5	±0.25
j	neck round on seam	23	23.5	24	24.5	25	±0.25
k	neck rib height	1	1	1	1	1	-
l	neck width shoulder seam to shoulder seam	7.75	8	8.25	8.5	8.75	±0.15
m	back neck drop	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	-
n	front neck drop	3	3	3	3	3	±0.15

CBF ITBP BSF NSG SSB CAPP


BORDER SECURITY FORCE (BSF) STANDARD




SPECIFICATION FOR COLOUR CODE
OF CLOTH DISRUPTIVE PATTERN



CJSF


ITBP


BSF


NSG

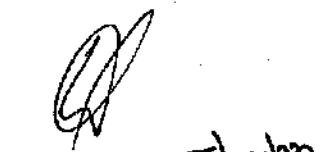
SSB

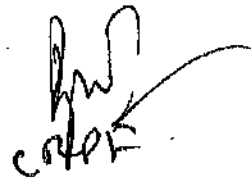
CRPF

(10) (8)

BSF



Fig. : SPECIFICATION FOR COLOUR CODE
OF CLOTH DISRUPTIVE PATTERN

[Signature]
CISF

[Signature]
ITBP

[Signature]
BSF

[Signature]
8/02

[Signature]
NSS
SSB

[Signature]
CPD

(11) (9)

BSF

Table-1A : Colour Specification of Disruptive Pattern-(Brown)

(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour : BROWN

System : CIE LCH

Illuminant Observer : D-65

Standard Observer : 10 Degree

Tristimulus Values	X	Y	Z
	5.664	5.640	4.432

LCH	L	C	H
	28.485	8.448	63.758

CMC (l:c) : 2:1

Colour Difference, ΔE_{cmc} : ≤ 3.0

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Diffuse (sphere) geometry spectrophotometer.

ITBP BSF 9/02 NSG SSB

(12) (10)

BSF

Table-1B : Colour Specification of Disruptive Pattern -(Green)

(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)


Colour	:	GREEN						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>4.103</td> <td>4.654</td> <td>4.176</td> </tr> </tbody> </table>	X	Y	Z	4.103	4.654	4.176
X	Y	Z						
4.103	4.654	4.176						
LCH	:	<table border="1"> <thead> <tr> <th>L</th> <th>C</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>25.725</td> <td>5.988</td> <td>135.782</td> </tr> </tbody> </table>	L	C	H	25.725	5.988	135.782
L	C	H						
25.725	5.988	135.782						
CMC (l:c)	:	2:1						
Colour Difference, ΔE_{cmc}	:	≤ 3.0						

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.

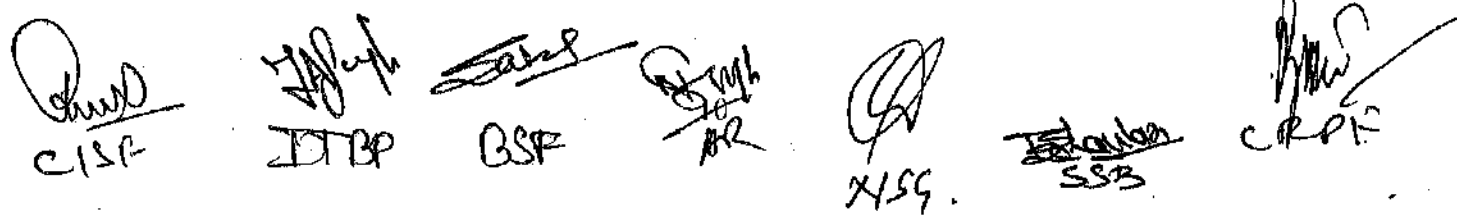

 CISP JTBP BSF AR NISG SSB CRPF

(13) (11)

BSF

Table-1C : Colour Specification of Disruptive Pattern-(Khaki)

(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour : KHAKI

System : CIE LCH

Illuminant Observer : D-65

Standard Observer : 10 Degree

Tristimulus Values	X	Y	Z
	16.918	17.722	10.822

LCH	L	C	H
	49.157	19.275	87.970

CMC (l:c) : 2:1

Colour Difference, ΔE_{cmc} : ≤ 3.0


Interpretation of Results:


- i) If ΔE_{cmc} is less than or equal to 3, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.


ABR



ITBP


BSF



AR


NSG


SSB


CRP

CENTRAL INDUSTRIAL SECURITY FORCE (CISF)

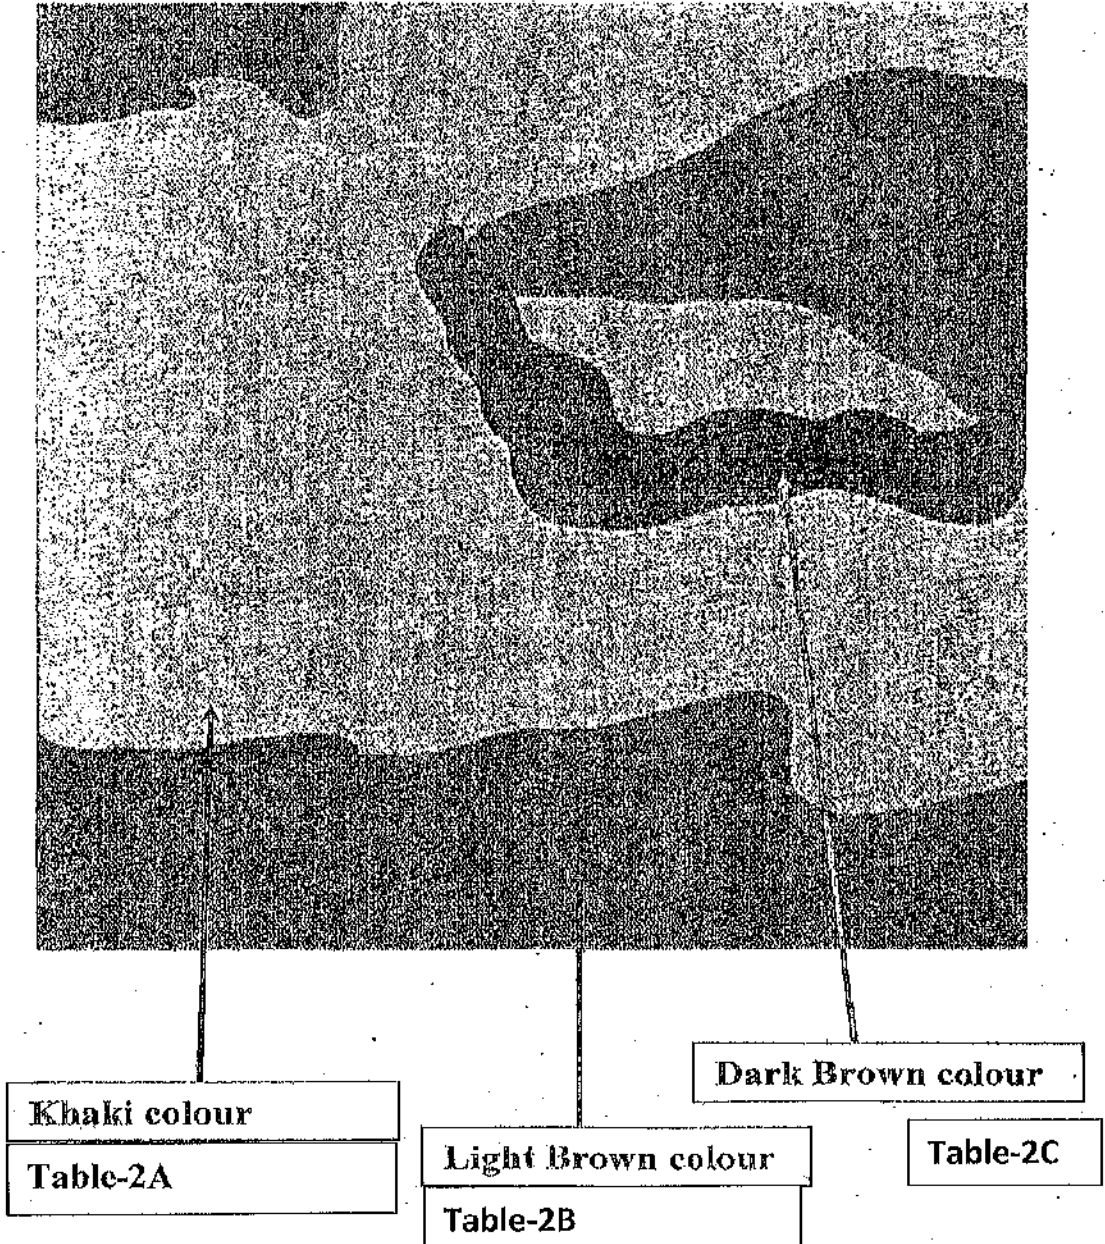

Picture of disruptive pattern cloth

COLOUR SPECIFICATION OF Cloth Disruptive Pattern-CISF

[Handwritten signatures and initials]
CISF ITBP BSF *[Signature]* NSG *[Signature]* SSB *[Signature]*

15 13

CISF

Table-2A: Colour Specification of Cloth Disruptive Pattern-Khaki
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)


Colour	:	KHAKE COLOUR		
System	:	CIE LCH		
Illuminant Observer	:	D-65		
Standard Observer	:	10 Degree		
Tristimulus Values	:	X	Y	Z
		19.649	19.862	12.822
LCH	:	L	C	H
		51.681	18.678	76.999
CMC (l:c)	:	2:1		
Colour Difference, ΔE_{cmc}	:	≤ 3		

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Diffuse (sphere) geometry spectrophotometer.

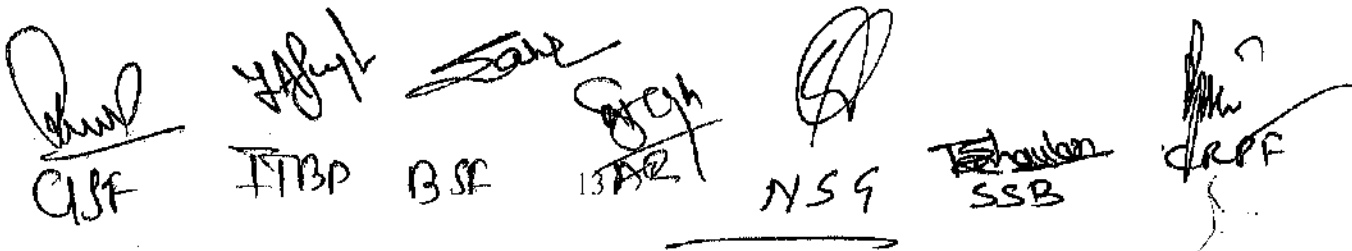

 CISF ITBP BSE 13 AR NSS SSB CRPF

16 14

CISF

Table-2B : Colour Specification of Cloth Disruptive Pattern-Light Brown
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)


Colour	:	LIGHT BROWN COLOUR		
System	:	CIE LCH		
Illuminant Observer	:	D-65		
Standard Observer	:	10 Degree		
Tristimulus Values	:	X	Y	Z
		7.187	7.007	3.972
LCH	:	L	C	H
		31.823	16.740	70.802
CMC (l:c)	:	2:1		
Colour Difference, ΔE_{cmc}	:	≤ 3		

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3.0, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3.0, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.

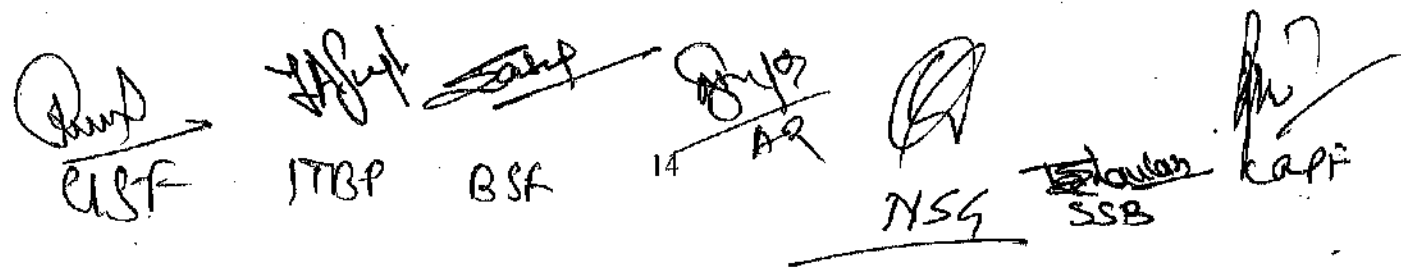

 CISF ITBP BSA 14 AQ NSG SSB KAP

17 15

CISF

Table-2C: Colour Specification of Disruptive Pattern-Dark Brown colour
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour : DARK BROWN COLOUR

System : CIE LCH

Illuminant Observer : D-65

Standard Observer : 10 Degree

Tristimulus Values :

X	Y	Z
4.924	4.651	2.999

LCH :

L	C	H
25.716	13.115	58.976

CMC (l:c) : 2:1


Colour Difference, ΔE_{cmc} : ≤ 3.0

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3.0, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3.0, the sample is unacceptable.

Note-1 : Absorbance/reflectance/transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.

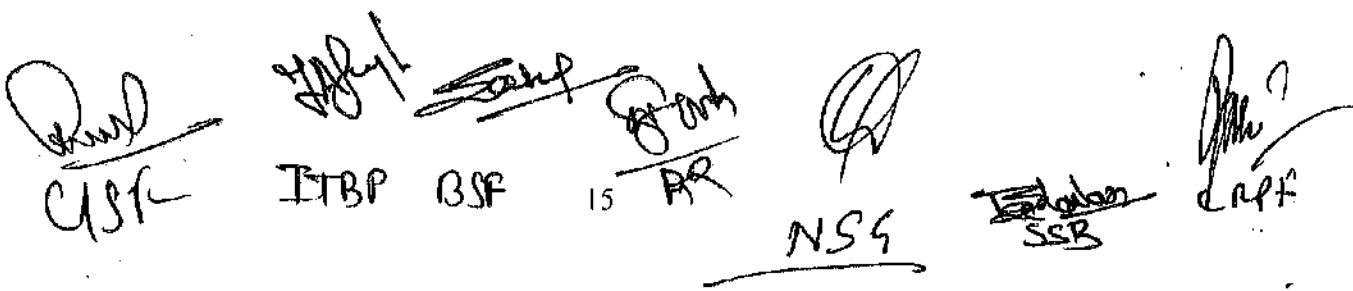


 CISF ITBP BSF 15 RR NSG SSR CRP

(18) (16)

ITBP

INDO TIBETAN BORDER POLICE FORCE

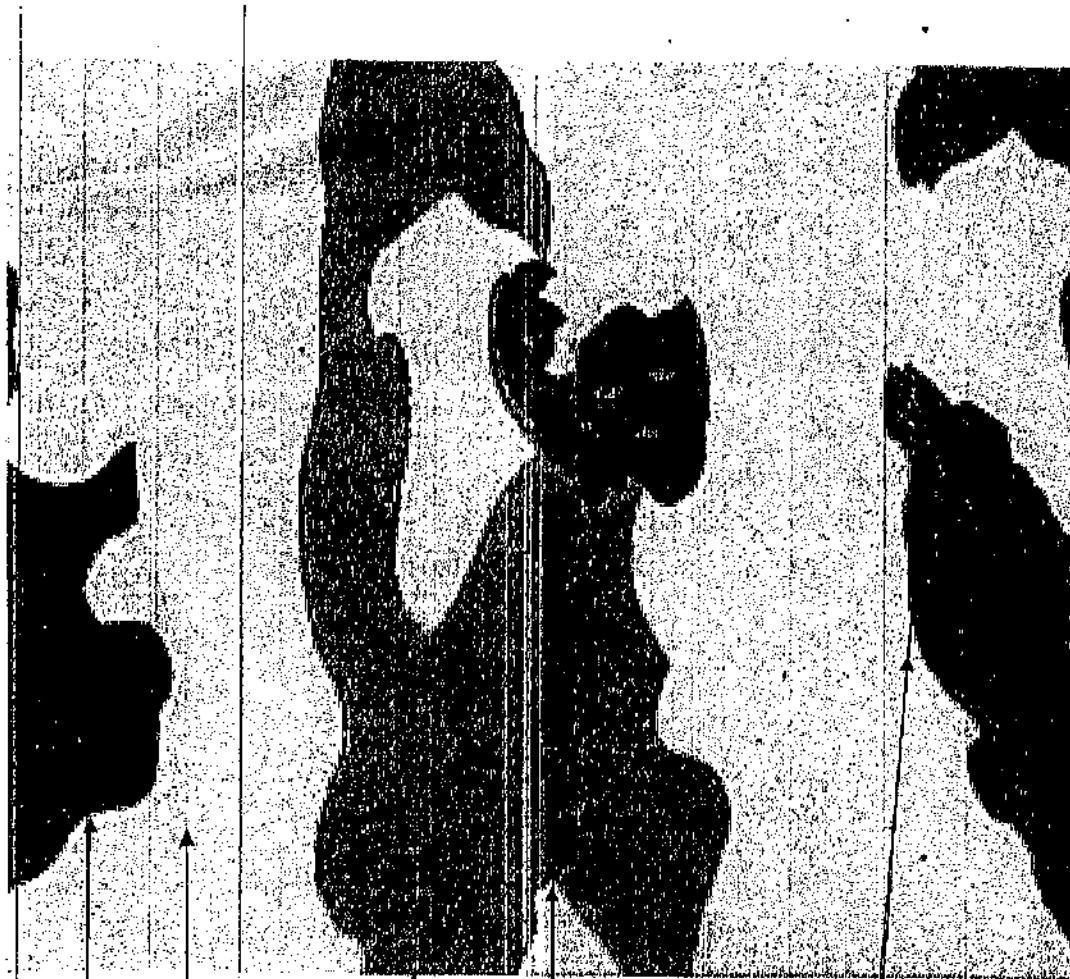

Dark Green
Table-3C

Beige
Table-3E

Light Brown
Table-3B

Light Green
Table-3D

Dark Brown
Table-3A

[Signature]
CISF

[Signature]
ITBP

[Signature]
BSF

[Signature]
16

[Signature]
NSS

[Signature]
SSB

[Signature]
CISF

Table-3A: Colour Specification of Cloth Disruptive (Regular Pattern)-Dark Brown
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour : Dark Brown

System : CIE LCH

Illuminant Observer : D-65

Standard Observer : 10 Degree

Tristimulus Values	X	Y	Z
	13.085	11.287	5.878

LCH	L	C	H
	40.060	26.656	50.968

CMC (l:c) : 2:1

Colour Difference, ΔE_{cmc} : ≤ 3.0

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.

QSR ITBP BSF 17 NSG SSB

20 18

ITBP

Table-3B : Colour Specification of Cloth Disruptive (Regular Pattern)-Light Brown
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)


Colour	:	LIGHT BROWN						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>18.264</td> <td>16.229</td> <td>8.161</td> </tr> </tbody> </table>	X	Y	Z	18.264	16.229	8.161
X	Y	Z						
18.264	16.229	8.161						
LCH	:	<table border="1"> <thead> <tr> <th>L</th> <th>C</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>47.274</td> <td>29.191</td> <td>56.583</td> </tr> </tbody> </table>	L	C	H	47.274	29.191	56.583
L	C	H						
47.274	29.191	56.583						
CMC (l:c)	:	2:1						
Colour Difference, ΔE_{cmc}	:	≤ 3.0						

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3.0, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3.0, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.

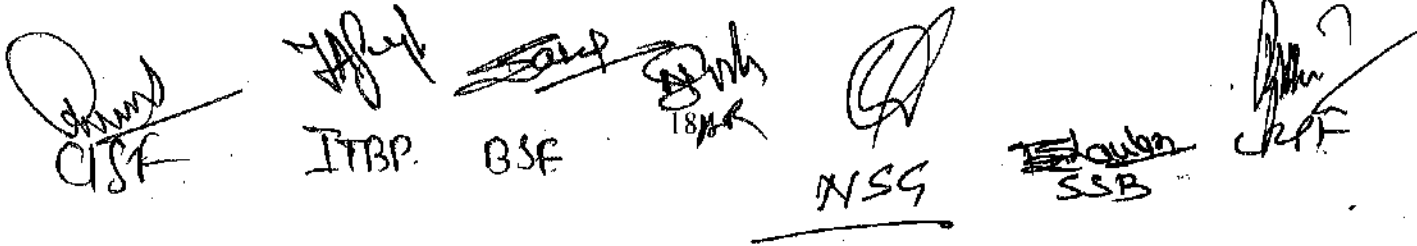

 ITBP BSE NSS SSB RPF

Table-3C: Colour Specification of Cloth Disruptive (Regular Pattern)-Dark Green
(Guideline of AATCC Test Method 173: 2009 & AATCC Evaluation Procedure-7:2009)

Colour : DARK GREEN

System : CIE LCH

Illuminant Observer : D-65

Standard Observer : 10 Degree

Tristimulus Values :

X	Y	Z
8.002	8.405	5.392

LCH :

L	C	H
34.812	13.823	88.617

CMC (l:c) : 2:1

Colour Difference, ΔE_{cmc} : ≤ 3.0

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3.0, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3.0, the sample is unacceptable.

Note-1 : Absorbance/reflectance/transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/fibre composition.

Note-2: Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.

C/SF ITBP BSF 19/08/09 DR NSG SSB CRP

Table-3D : Colour Specification of Cloth Disruptive (Regular Pattern)-Light Green
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour : LIGHT GREEN

System : CIE LCH

Illuminant Observer : D-65

Standard Observer : 10 Degree

Tristimulus Values	X	Y	Z
	12.159	12.854	8.200

LCH	L	C	H
	42.542	16.081	90.635

CMC (l:c) : 2:1


Colour Difference, ΔE_{cmc} : ≤ 3.0

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3.0, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3.0, the sample is unacceptable.

Note-1 : Absorbance/reflectance/transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.

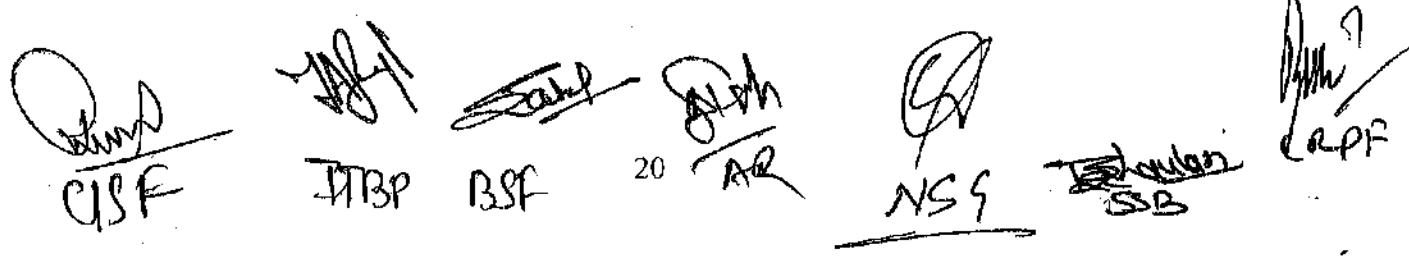

 CSF ITBP BSF 20 AR NSG SSB CRPR

23 21

ITBP

Table-3E: Colour Specification of Cloth Disruptive (Regular Pattern)-Beige Colour
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)


Colour	:	BEIGE COLOUR						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>50.337</td> <td>51.005</td> <td>44.003</td> </tr> </tbody> </table>	X	Y	Z	50.337	51.005	44.003
X	Y	Z						
50.337	51.005	44.003						
LCH	:	<table border="1"> <thead> <tr> <th>L</th> <th>C</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>76.682</td> <td>12.475</td> <td>64.237</td> </tr> </tbody> </table>	L	C	H	76.682	12.475	64.237
L	C	H						
76.682	12.475	64.237						
CMC (1:c)	:	2:1						
Colour Difference, ΔE_{cmc}	:	≤ 3.0						

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3.0, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3.0, the sample is unacceptable.


Note-1 : Absorbance/reflectance/transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.

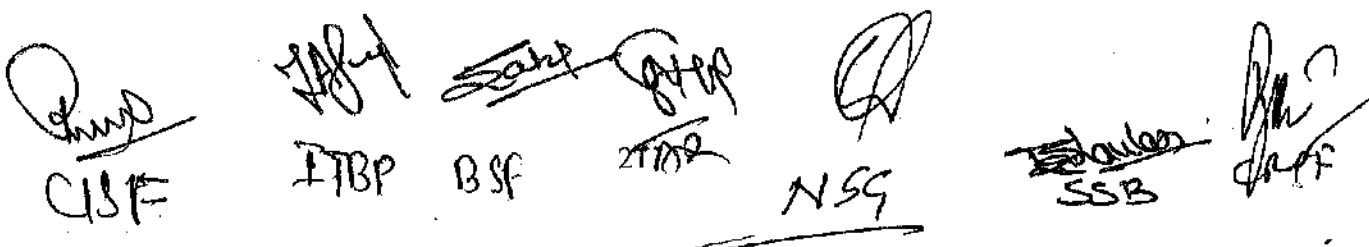

 CISF ITBP BSF 2102 NSG SSB JAF

INDO TIBETAN BORDER POLICE FORCE STANDARD

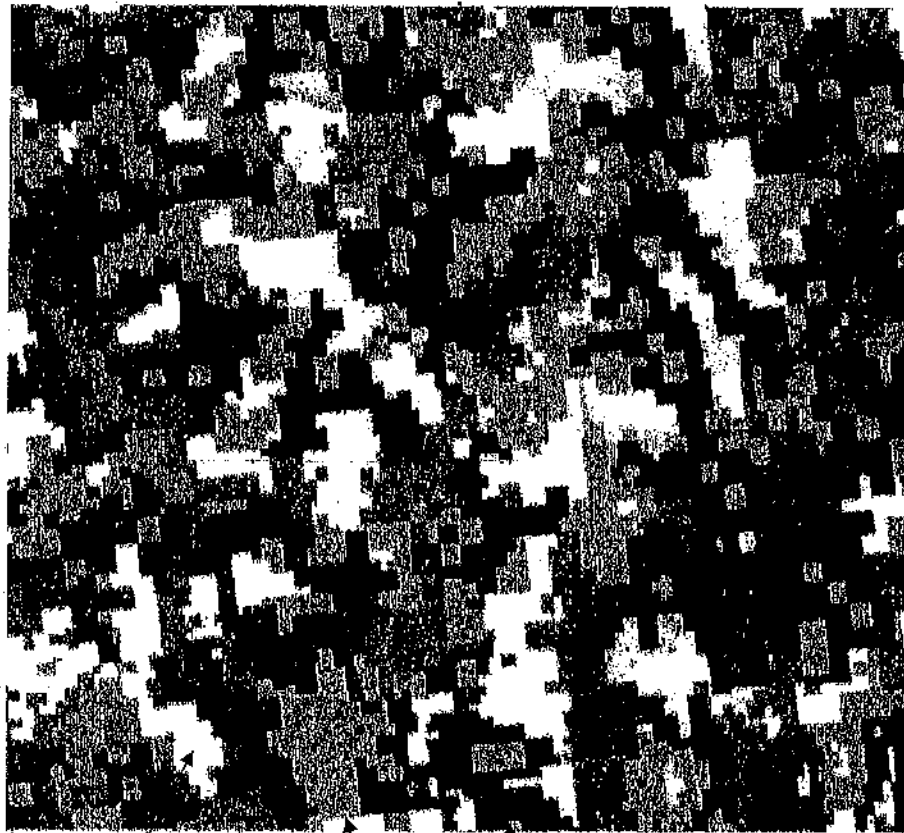

Khaki
Table-4A

Green
Table-4B

Black
Table-4D

Brown
Table-4C

SPECIFICATION FOR COLOUR CODE OF CLOTH DISRUPTIVE PATTERN (ANO)

[Signature]
CISF

[Signature]
ITBP

[Signature]
BSF

[Signature]
NSG

[Signature]
SSB

[Signature]
CRPF

23 23

ITBP

Table-4A: Colour Specification of Cloth Disruptive (ANO Pattern)-Khaki
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)


Colour	:	KHAKI						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1"> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td>22.115</td> <td>23.558</td> <td>15.980</td> </tr> </table>	X	Y	Z	22.115	23.558	15.980
	X	Y	Z					
22.115	23.558	15.980						
LCH	:	<table border="1"> <tr> <th>L</th> <th>C</th> <th>H</th> </tr> <tr> <td>55.643</td> <td>17.559</td> <td>93.264</td> </tr> </table>	L	C	H	55.643	17.559	93.264
	L	C	H					
55.643	17.559	93.264						
CMC (l:c)	:	2:1						
Colour Difference, ΔE_{cmc}	:	≤ 3.0						

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.

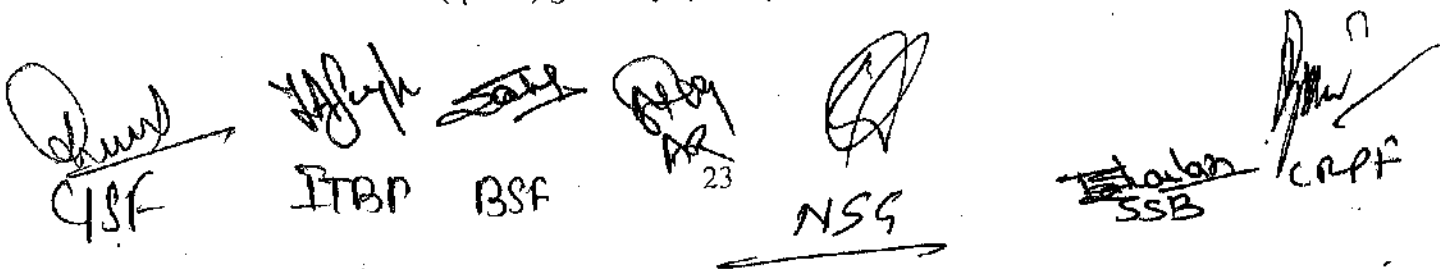

 QSF ITBP BSF AR 23 NSG SSB CRPF

(26) (24)

ITBP

Table-4B: Colour Specification of Cloth Disruptive (ANO Pattern)-Green
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour	:	GREEN						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1"><thead><tr><th>X</th><th>Y</th><th>Z</th></tr></thead><tbody><tr><td>8.942</td><td>10.059</td><td>6.062</td></tr></tbody></table>	X	Y	Z	8.942	10.059	6.062
X	Y	Z						
8.942	10.059	6.062						
LCH	:	<table border="1"><thead><tr><th>L</th><th>C</th><th>H</th></tr></thead><tbody><tr><td>37.948</td><td>17.013</td><td>106.828</td></tr></tbody></table>	L	C	H	37.948	17.013	106.828
L	C	H						
37.948	17.013	106.828						
CMC (l:c)	:	2:1						
Colour Difference, ΔE_{cmc}	:	≤ 3.0						

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3.0, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3.0, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.

(Handwritten signatures and initials)
C/SF, ITBP, BSF, NSG, SSR, etc.

24 25

ITBP

Table-4C : Colour Specification of Cloth Disruptive (ANO Pattern)-Brown Colour
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour	:	BROWN		
System	:	CIE LCH		
Illuminant Observer	:	D-65		
Standard Observer	:	10 Degree		
Tristimulus Values	:	X	Y	Z
		5.399	5.160	3.688
LCH	:	L	C	H
		27.186	11.318	56.538
CMC (1:c)	:	2:1		
Colour Difference, ΔE_{cmc}	:	≤ 3.0		

Interpretation of Results:

- iii) If ΔE_{cmc} is less than or equal to 3.0, then sample is acceptable.
- iv) If ΔE_{cmc} is greater than 3.0, the sample is unacceptable.

Note-1 : Absorbance/reflectance/transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/fibre composition.

Note-2: Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.

CISF ITBP BSF AR NSS SSB CRPF

Table-4D : Colour Specification of Cloth Disruptive (ANO Pattern)-Black Colour
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour : BLACK

System : CIE LCH

Illuminant Observer : D-65

Standard Observer : 10 Degree

Tristimulus Values	X	Y	Z
	3.353	3.428	3.156

LCH	L	C	H
	21.682	3.670	62.153

CMC (1:c) : 2:1

Colour Difference, ΔE_{cmc} : ≤ 3.0

Interpretation of Results:

- iii) If ΔE_{cmc} is less than or equal to 3, then sample is acceptable.
- iv) If ΔE_{cmc} is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/reflectance/transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173 using Defuse (sphere) geometry spectrophotometer.

[Signature]
G/SF

[Signature]
ITBP

[Signature]
BSF

[Signature]
M/S

[Signature]
NSG

[Signature]
SSB

[Signature]
C/SF


39 27


SASHASTRA SEEMA BAL (SSB)





COLOUR SPECIFICATION:
ACCORDING TO SSB CLOTH I.F.C.D (REGULAR) PATTERN


CISF


ITBP


BSF


Ass 27


NSG


SSB


CRPF

CENTRAL RESERVE POLICE FORCE (CRPF)



GREEN
TABLE-5A

BROWN
TABLE-5B

KHAKI
TABLE-5C

Disruptive Print-Colour Specification for CRPF

[Signature]
CISF

[Signature]
ITBP

[Signature]
BSF

[Signature]
AR 28

[Signature]
NSG

[Signature]
SSB

[Signature]
CRPF

Table-5A: Specification of colour Disruptive Pattern-Green
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)


Colour	:	Green		
System	:	CIE LCH		
Illuminant Observer	:	D-65		
Standard Observer	:	10 Degree		
Tristimulus Values	:	X	Y	Z
		4.385	4.766	3.826
LCH	:	L	C	H
		26.057	6.933	104.977
CMC (l:c)	:	2:1		
Colour Difference, ΔE_{cmc}	:	≤ 3.0		

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.

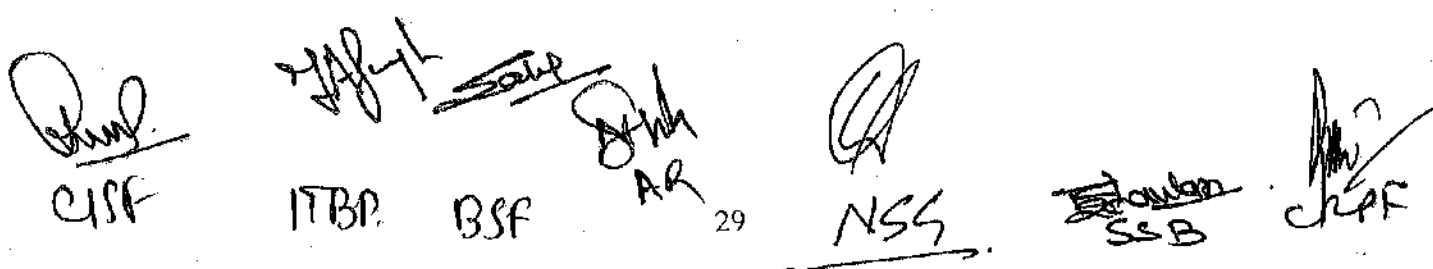

 C/SF ITBP BSF AR NSG SSB CRPF

Table-5B: Specification of colour Disruptive Pattern-Brown
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour	:	Brown	
System	:	CIE LCH	
Illuminant Observer	:	D-65	
Standard Observer	:	10 Degree	
Tristimulus Values	:	X	Y
		Z	
		5.262	5.192
			4.030
LCH	:	L	C
		H	
		27.275	8731
			61.138
CMC (l:c)	:	2:1	
Colour Difference, ΔE_{cmc}	:	≤ 3.0	

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.

Table-5C: Specification of colour Disruptive Pattern-Khaki
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)







Colour	:	Khaki						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1"> <tr> <td>X</td> <td>Y</td> <td>Z</td> </tr> <tr> <td>19.478</td> <td>19.974</td> <td>12.295</td> </tr> </table>	X	Y	Z	19.478	19.974	12.295
	X	Y	Z					
19.478	19.974	12.295						
LCH	:	<table border="1"> <tr> <td>L</td> <td>C</td> <td>H</td> </tr> <tr> <td>51.808</td> <td>19.983</td> <td>81.959</td> </tr> </table>	L	C	H	51.808	19.983	81.959
	L	C	H					
51.808	19.983	81.959						
CMC (1:c)	:	2:1						
Colour Difference, ΔE_{cmc}	:	≤ 3.0						

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.

ITBD. BSR. NSG. SSB. CRPF

31

CoBRA (CRPF)

Disruptive Print-Colour Specification for CoBRA, CRPF



Dark Green
TABLE-6A

Khaki
TABLE-6C

Light Green
TABLE-6B

Fig. 2 : Disruptive Print -LIGHT COLOUR (For colour identification only)

[Handwritten signature]
QSF

418-71
ITBP

[Handwritten signature]
BSF

[Handwritten signature]
32

[Handwritten signature]
NSG

[Handwritten signature]
SSB

[Handwritten signature]
CRPF

CoBRA (CRPF)




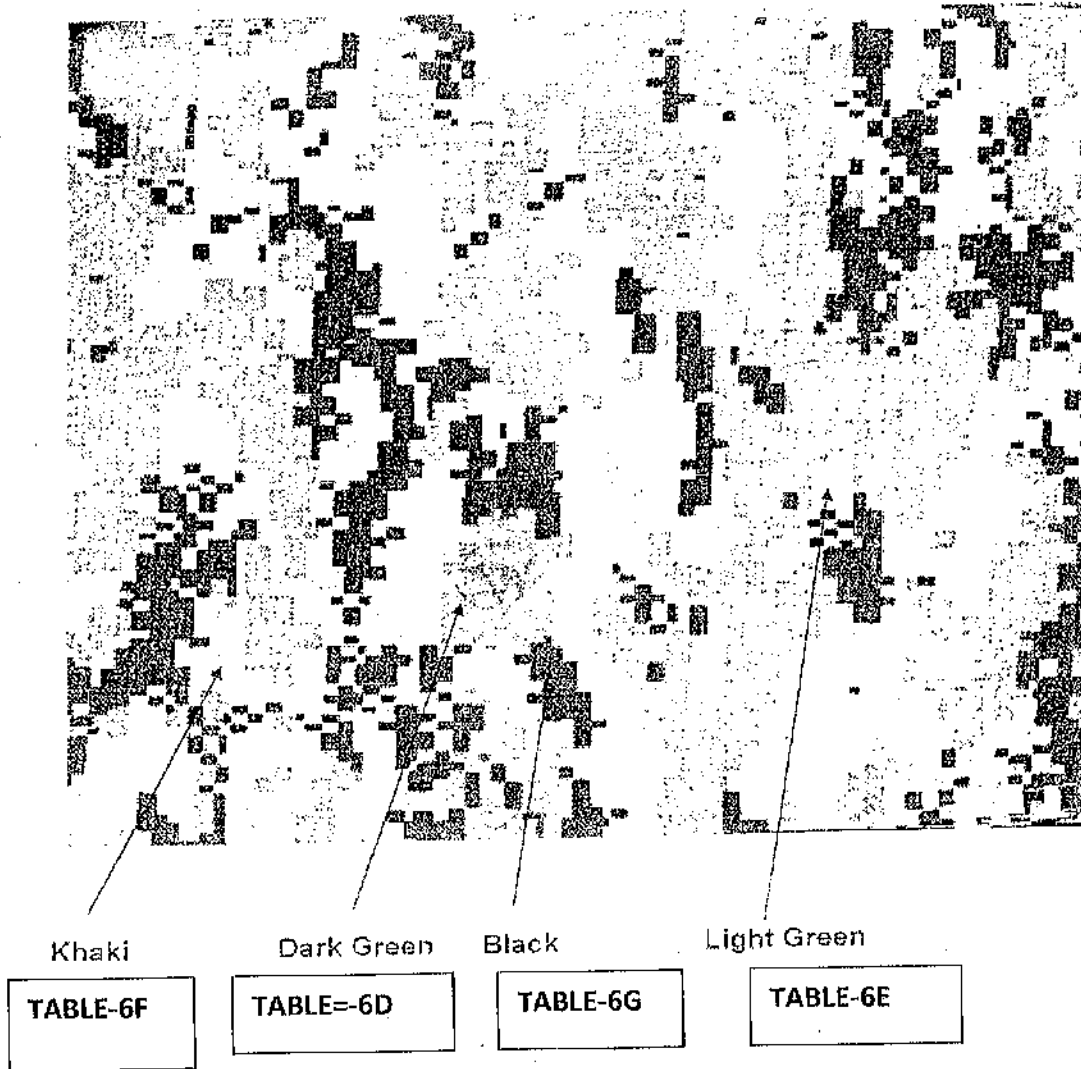




Fig. 3 Disruptive Print -DARK COLOUR (For colour identification only)



 CSF



 ITBR


 BSF


 NSG


 NSG


 SSB


 CRPF

33

CoBRA (CRPF)

TABLE-6(A-C): DISRUPTIVE PRINT-LIGHT COLOUR
Table-6A: Specification of colour Disruptive Pattern –Dark Green
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)


Colour	:	Dark Green						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>12.113</td> <td>13.044</td> <td>12.675</td> </tr> </tbody> </table>	X	Y	Z	12.113	13.044	12.675
X	Y	Z						
12.113	13.044	12.675						
LCH	:	<table border="1"> <thead> <tr> <th>L</th> <th>C</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>42.829</td> <td>3.739</td> <td>117.481</td> </tr> </tbody> </table>	L	C	H	42.829	3.739	117.481
L	C	H						
42.829	3.739	117.481						
CMC (l:c)	:	2:1						
Colour Difference, ΔE_{cmc}	:	≤ 3.0						

Interpretation of Results:

- iii) If ΔE_{cmc} is less than or equal to 3, then sample is acceptable.
- iv) If ΔE_{cmc} is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.

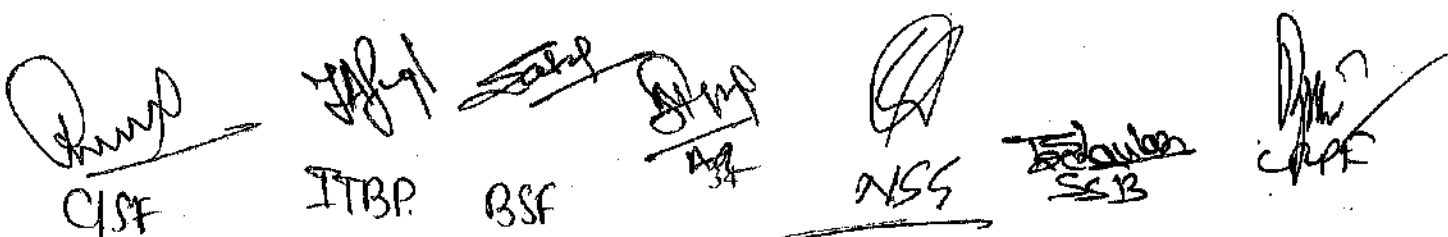

 C/SF ITBP BSF ~~NSG~~ NSG ~~NSG~~ CRPF

CoBRA (CRPF)

Table-6B: Specification of colour Disruptive Pattern (Light Colour)-Light Green
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour	:	Light Green						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table style="width: 100%; border-collapse: collapse; margin: 0 auto;"> <thead> <tr> <th style="width: 33.33%; border: 1px solid black;">X</th> <th style="width: 33.33%; border: 1px solid black;">Y</th> <th style="width: 33.33%; border: 1px solid black;">Z</th> </tr> </thead> <tbody> <tr> <td style="border: 1px solid black; text-align: center;">19.319</td> <td style="border: 1px solid black; text-align: center;">20.577</td> <td style="border: 1px solid black; text-align: center;">18.966</td> </tr> </tbody> </table>	X	Y	Z	19.319	20.577	18.966
X	Y	Z						
19.319	20.577	18.966						
LCH	:	<table style="width: 100%; border-collapse: collapse; margin: 0 auto;"> <thead> <tr> <th style="width: 33.33%; border: 1px solid black;">L</th> <th style="width: 33.33%; border: 1px solid black;">C</th> <th style="width: 33.33%; border: 1px solid black;">H</th> </tr> </thead> <tbody> <tr> <td style="border: 1px solid black; text-align: center;">52.783</td> <td style="border: 1px solid black; text-align: center;">5.930</td> <td style="border: 1px solid black; text-align: center;">99.085</td> </tr> </tbody> </table>	L	C	H	52.783	5.930	99.085
L	C	H						
52.783	5.930	99.085						
CMC (l:c)	:	2:1						
Colour Difference, ΔE_{cmc}	:	≤ 3.0						


Interpretation of Results:


- i) If ΔE_{cmc} is less than or equal to 3, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3, the sample is unacceptable.


Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.


CISF


ITBP


BSF


35


NSG


SSB


CRPF

CoBRA (CRPF)

Table-6C: Specification of colour Disruptive Pattern (Light Colour)-Khaki
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour	:	Khaki						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>31.643</td> <td>32.716</td> <td>28.306</td> </tr> </tbody> </table>	X	Y	Z	31.643	32.716	28.306
X	Y	Z						
31.643	32.716	28.306						
LCH	:	<table border="1"> <thead> <tr> <th>L</th> <th>C</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>63.930</td> <td>9.848</td> <td>76.272</td> </tr> </tbody> </table>	L	C	H	63.930	9.848	76.272
L	C	H						
63.930	9.848	76.272						
CMC (l:c)	:	2:1						
Colour Difference, ΔE_{cmc}	:	≤ 3.0						

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.

[Signature]
CISF

[Signature]
ITBP

[Signature]
BSF

[Signature]
AR
36

[Signature]
NSG

[Signature]
SSB

[Signature]
CRPF

TABLE-6(D-G): DISRUPTIVE PRINT-DARK COLOUR

Table-6D: Specification of colour Disruptive Pattern (Dark Colour)-DARK GREEN COLOUR

(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)


Colour	:	Dark Green						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%; text-align: center;">X</td> <td style="width: 33%; text-align: center;">Y</td> <td style="width: 33%; text-align: center;">Z</td> </tr> <tr> <td style="text-align: center;">5.234</td> <td style="text-align: center;">5.964</td> <td style="text-align: center;">4.813</td> </tr> </table>	X	Y	Z	5.234	5.964	4.813
		X	Y	Z				
5.234	5.964	4.813						
LCH	:	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%; text-align: center;">L</td> <td style="width: 33%; text-align: center;">C</td> <td style="width: 33%; text-align: center;">H</td> </tr> <tr> <td style="text-align: center;">29.321</td> <td style="text-align: center;">8.650</td> <td style="text-align: center;">124.923</td> </tr> </table>	L	C	H	29.321	8.650	124.923
L	C	H						
29.321	8.650	124.923						
CMC (l:c)	:	2:1						
Colour Difference, ΔE_{cmc}	:	≤ 3.0						

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.

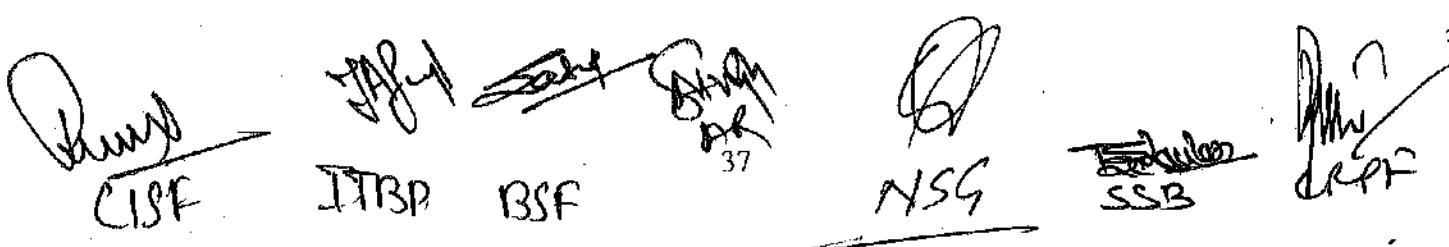

40 38

CoBRA (CRPF)

Table-6E: Specification of colour Disruptive Pattern (Dark Colour)-LIGHT GREEN COLOUR

(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour	:	Light Green						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>13.838</td> <td>14.418</td> <td>11.139</td> </tr> </tbody> </table>	X	Y	Z	13.838	14.418	11.139
X	Y	Z						
13.838	14.418	11.139						
LCH	:	<table border="1"> <thead> <tr> <th>L</th> <th>C</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>44.827</td> <td>10.951</td> <td>84.217</td> </tr> </tbody> </table>	L	C	H	44.827	10.951	84.217
L	C	H						
44.827	10.951	84.217						
CMC (l:c)	:	2:1						
Colour Difference, ΔE_{cmc}	:	≤ 3.0						

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.

Anand
 ITBP BSF 38 NSG SSB CRPF

CoBRA (CRPF)

Table-6F: Specification of colour Disruptive Pattern (Dark Colour)-KHAKE COLOUR

(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour : Khaki

System : CIE LCH

Illuminant Observer : D-65

Standard Observer : 10 Degree

Tristimulus Values	X	Y	Z
	10.410	10.217	6.302

LCH	L	C	H
	38.229	16.771	70.096

CMC (1:c) : 2:1


Colour Difference, ΔE_{cmc} : ≤ 3.0

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.

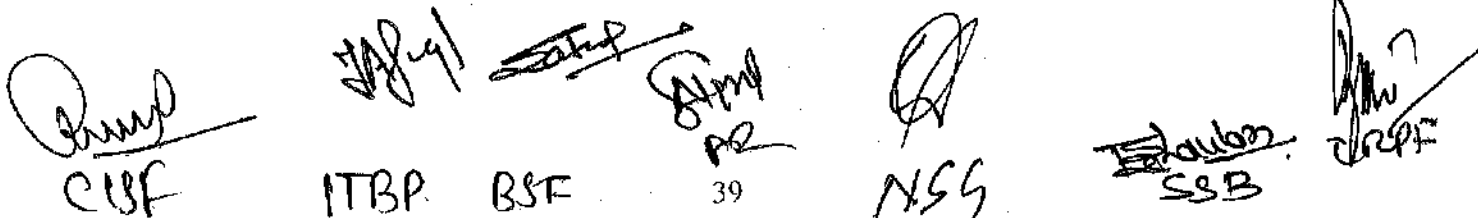

 CBP ITBP BSE NSG SSB CRPF

(42) (40)

CoBRA (CRPF)

Table-6G: Specification of colour Disruptive Pattern (Dark Colour)-BLACK COLOUR

(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour	:	Black						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%; text-align: center;">X</td> <td style="width: 33%; text-align: center;">Y</td> <td style="width: 33%; text-align: center;">Z</td> </tr> <tr> <td style="text-align: center;">2.294</td> <td style="text-align: center;">2.393</td> <td style="text-align: center;">2.994</td> </tr> </table>	X	Y	Z	2.294	2.393	2.994
		X	Y	Z				
2.294	2.393	2.994						
LCH	:	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%; text-align: center;">L</td> <td style="width: 33%; text-align: center;">C</td> <td style="width: 33%; text-align: center;">H</td> </tr> <tr> <td style="text-align: center;">17.428</td> <td style="text-align: center;">3.064</td> <td style="text-align: center;">280.297</td> </tr> </table>	L	C	H	17.428	3.064	280.297
		L	C	H				
17.428	3.064	280.297						
CMC (1:c)	:	2:1						
Colour Difference, ΔE_{cmc}	:	≤ 3.0						

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.

[Signature]
CISF

[Signature]
ITBP BSF


[Signature]
AR

[Signature]
NSG

[Signature]
SSB

[Signature]
CRPF

RAPID ACTION FORCE(RAF), CRPF

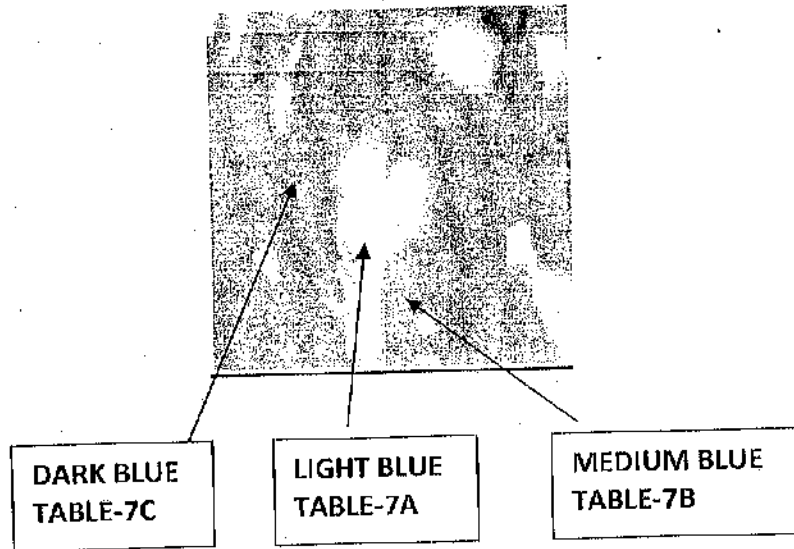

**COLOUR SPECIFICATION OF DISRUPTIVE PATTERN
RAF, CRPF**

Prasad
CISF

Yash
ITBP

Sanjay
BSF

Prakash
AR

Prakash
NSG

Shankar
SSB

Prakash
CRPF

440 42

RAF, CRPF

Table-7A: Colour Specification of Cloth Disruptive Pattern-Light Blue
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)

Colour	:	Light Blue						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>23.673</td> <td>25.605</td> <td>45.514</td> </tr> </tbody> </table>	X	Y	Z	23.673	25.605	45.514
X	Y	Z						
23.673	25.605	45.514						
LCH	:	<table border="1"> <thead> <tr> <th>L</th> <th>C</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>57.660</td> <td>23.383</td> <td>263.32</td> </tr> </tbody> </table>	L	C	H	57.660	23.383	263.32
L	C	H						
57.660	23.383	263.32						
CMC (l:c)	:	2:1						
Colour Difference, ΔE_{cmc}	:	≤ 3.0						

Interpretation of Results:

- v) If ΔE_{cmc} is less than or equal to 3, then sample is acceptable.
- vi) If ΔE_{cmc} is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.

CIST ITBP BSF NSS ~~SSB~~

Table-7B: Colour Specification of Cloth Disruptive Pattern-Medium Blue
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)


Colour	:	Medium Blue						
System	:	CIE LCH						
Illuminant Observer	:	D-65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1"> <tr> <td>X</td> <td>Y</td> <td>Z</td> </tr> <tr> <td>11.164</td> <td>11.863</td> <td>25.099</td> </tr> </table>	X	Y	Z	11.164	11.863	25.099
	X	Y	Z					
11.164	11.863	25.099						
LCH	:	<table border="1"> <tr> <td>L</td> <td>C</td> <td>H</td> </tr> <tr> <td>40.998</td> <td>24.040</td> <td>268.623</td> </tr> </table>	L	C	H	40.998	24.040	268.623
	L	C	H					
40.998	24.040	268.623						
CMC (l:c)	:	2:1						
Colour Difference, ΔE_{cmc}	:	≤ 3.0						

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.

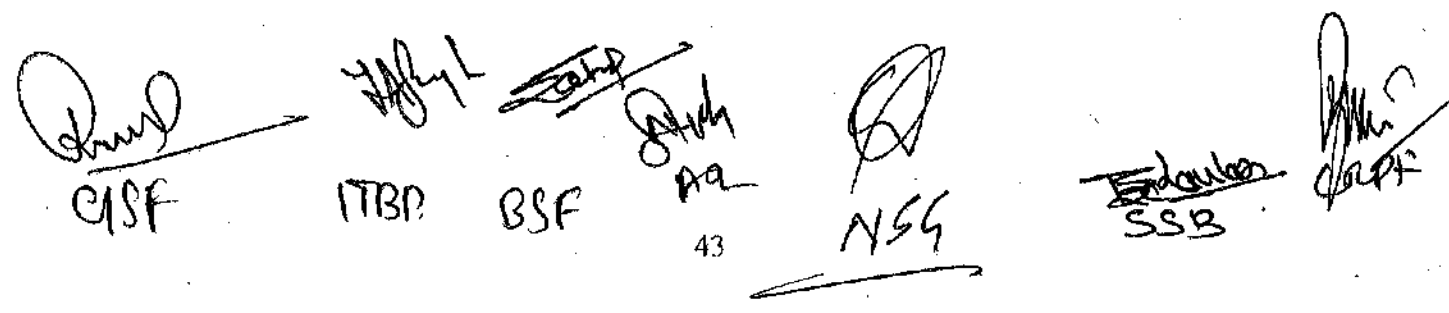

 CSF ITBP BSF AA NSG SSB CRPF

(46) (44)

RAF, CRPF

Table-7C: Colour Specification of Cloth Disruptive Pattern-Dark Blue
(Guideline of AATCC Test Method 173 : 2009 & AATCC Evaluation Procedure-7:2009)


Colour	:	Dark Blue		
System	:	CIE LCH		
Illuminant Observer	:	D-65		
Standard Observer	:	10 Degree		
Tristimulus Values	:	X	Y	Z
		3.878	3.905	9.061
LCH	:	L	C	H
		23.355	20.051	277.651
CMC (l:c)	:	2:1		
Colour Difference, ΔE_{cmc}	:	≤ 3.0		

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3, the sample is unacceptable.

Note-1 : Absorbance/ reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between sample of same type i.e. identical fabric construction parameters and filament/ fibre composition.

Note-2 Test should be carried out after proper conditioning as per AATCC 173.

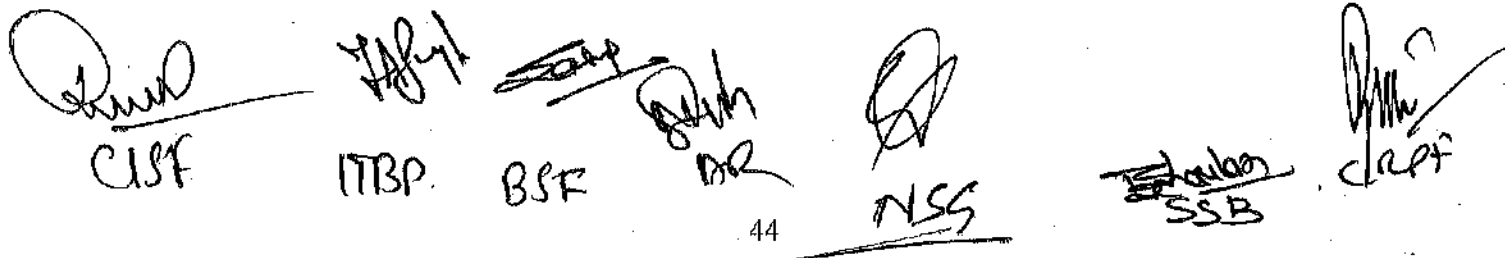

 CISF ITBP BSR DR NSS SSB CRPF

VIP Security, CRPF

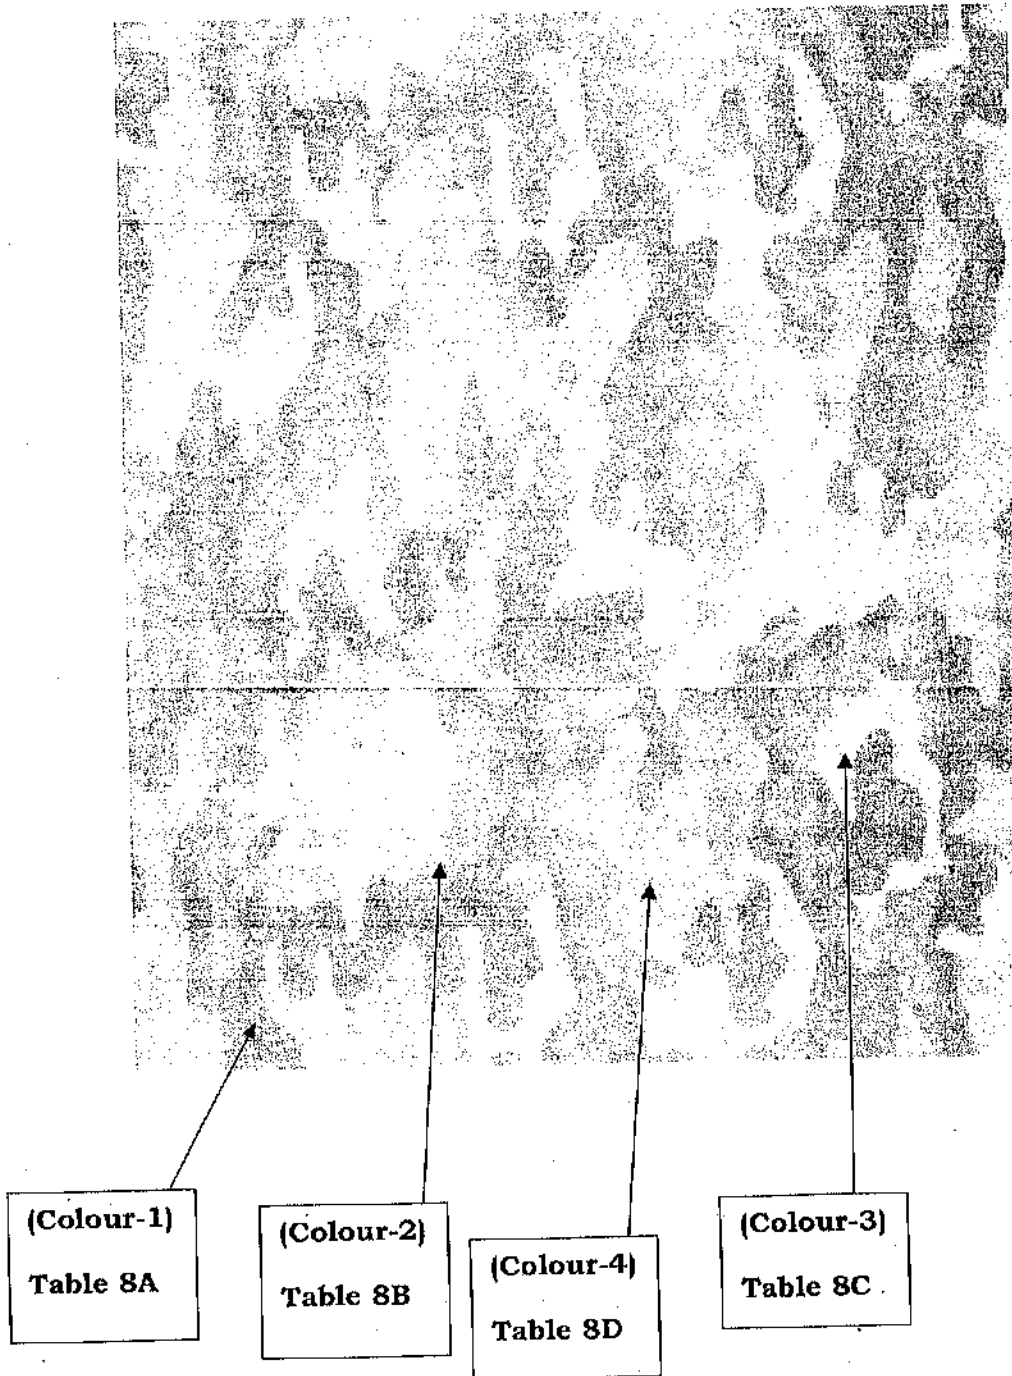


Fig. : Disruptive Print (For colour identification only)

COLOUR SPECIFICATION OF DISRUPTIVE PATTERN

VIP Security, CRPF

[Signature]
CISF

[Signature]
ITBP

[Signature]
BSF. *[Signature]*
AR

[Signature]
NSG


[Signature]
SSB

[Signature]
CRPF

(48) (46)

VIP Security, CRPF

TABLE 8A (Fig.) Specification of colour of Cloth disruptive-Colour-1
(AATCC Test method 173 : 2009 & AATCC Evaluation Procedure 7 : 2009)


Colour	:		Colour-1					
System	:	CIE LCH						
Illuminant Observer	:	D 65						
Standard Observer	:	10 Degree						
Tristimulus Values	:	<table border="1" style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 5px;">X</td> <td style="padding: 5px;">Y</td> <td style="padding: 5px;">Z</td> </tr> <tr> <td style="padding: 5px; text-align: center;">9.273</td> <td style="padding: 5px; text-align: center;">9.878</td> <td style="padding: 5px; text-align: center;">10.216</td> </tr> </table>	X	Y	Z	9.273	9.878	10.216
X	Y	Z						
9.273	9.878	10.216						
LCH	:	<table border="1" style="margin: auto; border-collapse: collapse;"> <tr> <td style="padding: 5px;">L</td> <td style="padding: 5px;">C</td> <td style="padding: 5px;">H</td> </tr> <tr> <td style="padding: 5px; text-align: center;">37.623</td> <td style="padding: 5px; text-align: center;">1.364</td> <td style="padding: 5px; text-align: center;">122.874</td> </tr> </table>	L	C	H	37.623	1.364	122.874
L	C	H						
37.623	1.364	122.874						
CMC (l:c)	:	2:1						
Colour difference, ΔE_{cmc}	:	≤ 3.0						

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3.0, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3.0, then sample is unacceptable.

Note-1 : Absorbance/reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between samples of same type i.e., identical fabric construction parameters and filament/ fibre composition.


Note-2 : Test should be carried out after proper conditioning as per AATCC 173.

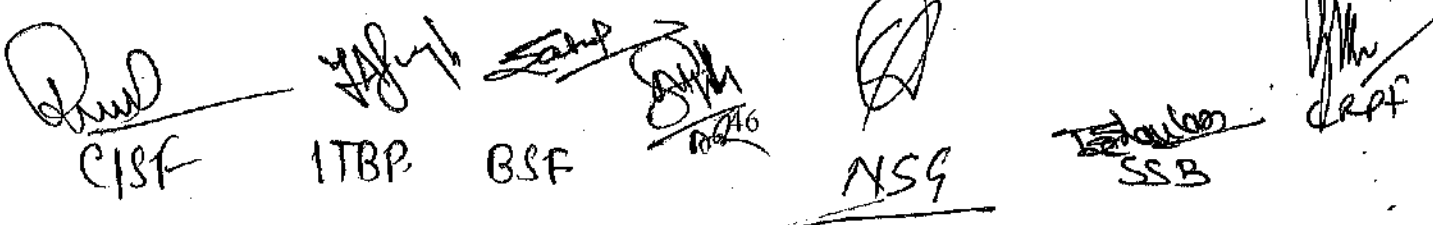

49 47

VIP Security, CRPF

TABLE 8B (Fig.) Specification of colour of Cloth disruptive-Colour-2
(AATCC Test method 173 : 2009 & AATCC Evaluation Procedure 7 : 2009)

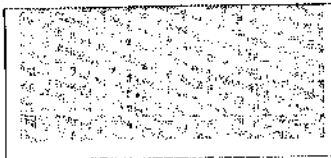






Colour	:		Colour-2						
System	:	CIE LCH							
Illuminant Observer	:	D 65							
Standard Observer	:	10 Degree							
Tristimulus Values	:	<table border="1"> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> <tr> <td>13.127</td> <td>14.041</td> <td>14.564</td> </tr> </table>	X	Y	Z	13.127	14.041	14.564	
X	Y	Z							
13.127	14.041	14.564							
LCH	:	<table border="1"> <tr> <th>L</th> <th>C</th> <th>H</th> </tr> <tr> <td>44.292</td> <td>1.679</td> <td>134.946</td> </tr> </table>	L	C	H	44.292	1.679	134.946	
L	C	H							
44.292	1.679	134.946							
CMC (1:c)	:	2:1							
Colour difference, ΔE_{cmc}	:	≤ 3.0							

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3.0, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3.0, then sample is unacceptable.

Note-1 : Absorbance/reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between samples of same type i.e., identical fabric construction parameters and filament/ fibre composition.


Note-2 : Test should be carried out after proper conditioning as per AATCC 173.

 R. S. Singh
 N. B. P.
 B. S. F.
 D. K. S.
 N. S. S.
 S. S. B.
 K. P. P.

(50) (48)

VIP Security, CRPF

TABLE 8C (Fig.) Specification of colour of Cloth disruptive-Colour-3
(AATCC Test method 173 : 2009 & AATCC Evaluation Procedure 7 : 2009)

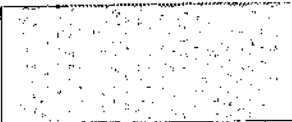




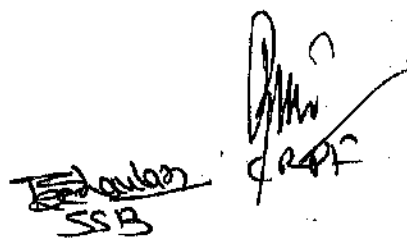
Colour	:		Colour-3						
System	:	CIE LCH							
Illuminant Observer	:	D 65							
Standard Observer	:	10 Degree							
Tristimulus Values	:	<table border="1"> <tr><th>X</th><th>Y</th><th>Z</th></tr> <tr><td>19.156</td><td>20.574</td><td>2.355</td></tr> </table>	X	Y	Z	19.156	20.574	2.355	
X	Y	Z							
19.156	20.574	2.355							
L C H	:	<table border="1"> <tr><th>L</th><th>C</th><th>H</th></tr> <tr><td>52.480</td><td>1.810</td><td>195.074</td></tr> </table>	L	C	H	52.480	1.810	195.074	
L	C	H							
52.480	1.810	195.074							
CMC (1:c)	:	2:1							
Colour difference, ΔE_{cmc}	:	≤ 3.0							

Interpretation of Results:

- i) If ΔE_{cmc} is less than or equal to 3.0, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3.0, then sample is unacceptable.

Note-1 : Absorbance/reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between samples of same type i.e., identical fabric construction parameters and filament/ fibre composition.


Note-2 : Test should be carried out after proper conditioning as per AATCC 173.

 CBF
  ITBP
  BSF
  NSG
  SSB
  CRPF

51 49

VIP Security, CRPF

TABLE 8 D (Fig.) Specification of colour of Cloth disruptive
(AATCC Test method 173 : 2009 & AATCC Evaluation Procedure 7 : 2009)

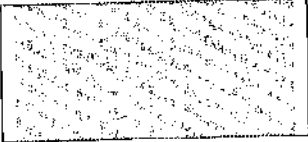Colour	:		Colour-4						
System	:	CIE LCH							
Illuminant Observer	:	D 65							
Standard Observer	:	10 Degree							
Tristimulus Values	:	<table border="1"> <tr> <td>X</td> <td>Y</td> <td>Z</td> </tr> <tr> <td>15.951</td> <td>17.234</td> <td>18.920</td> </tr> </table>	X	Y	Z	15.951	17.234	18.920	
X	Y	Z							
15.951	17.234	18.920							
LCH	:	<table border="1"> <tr> <td>L</td> <td>C</td> <td>H</td> </tr> <tr> <td>48.554</td> <td>2.347</td> <td>200.673</td> </tr> </table>	L	C	H	48.554	2.347	200.673	
L	C	H							
48.554	2.347	200.673							
CMC (l:c)	:	2:1							
Colour difference, ΔE_{cmc}	:	≤ 3.0							


Interpretation of Results:


- i) If ΔE_{cmc} is less than or equal to 3.0, then sample is acceptable.
- ii) If ΔE_{cmc} is greater than 3.0, then sample is unacceptable.

Note-1 : Absorbance/reflectance/ transmittance are affected by surface characteristic features of the substrate. Therefore comparison should be made between samples of same type i.e., identical fabric construction parameters and filament/ fibre composition.


Note-2 : Test should be carried out after proper conditioning as per AATCC 173.



CSF



ITBP


BSF


AD


NSS


SSB



CRPF

Number of T-Shirts to be selected from a lot and permissible number of Non-conforming T-Shirts

No. of the T-Shirt in the lot	Non-destructive Testing		Non-destructive Testing	
	Number of the T-Shirt to be selected	Number of the T-Shirt to be selected	Number of T-Shirts to be selected	Permissible Number of Non-conforming T-Shirts
(1)	(2)	(3)	(4)	(5)
Up to 300	10	1	2	0
301-500	20	1	3	0
501-1000	30	2	5	0
1001-3000	50	3	8	0
3001 and above	80	5	13	1

 **A/Rif**  **BSF**  **CISF**  **CRPF**  **ITBP**  **SSB**  **NSG**


Anupam Kulshreshtha, IPS, IG(Prov), CRPF


**Rajeev Rai Bhatnagar, IPS
BG CRPF**