


मुख्यालय राष्ट्रीय सुरक्षा गारद
गृह मंत्रालय (भारत सरकार)
सम्भरण शाखा (आयुध अनुभाग)
मेहरम नगर, पालम, नई दिल्ली-37

संख्या-पी/604/24/389/ई0-151691/असॉल्ट राईफल /संभरण(ऑर्डनेंस)/मु0रा0सु0गा0/ 4545 दि0 22 जुलाई 2025

विषय: 7.62 X 39 एम0एम0 असॉल्ट राईफल (7.62 x 39mm Assault Rifle) के परिशोधित गुणात्मक आवश्यकता (क्यू.आर.) और परीक्षण निर्देशों (टी.डी.) का प्रेषण।

तकनीकी विशेषज्ञों के उप समूह द्वारा किए गये सूत्रीकरण एवम महनिदेशक, राष्ट्रीय सुरक्षा गारद द्वारा अनुमोदित 7.62 X 39 एम0एम0 असॉल्ट राईफल (7.62 x 39mm Assault Rifle) के परिशोधित गुणात्मक आवश्यकता (क्यू.आर.) और परीक्षण निर्देशों (टी.डी.) को अग्रिम कार्यवाही हेतु प्रेषित किया जाता है।

संलग्न- उपरोक्तानुसार

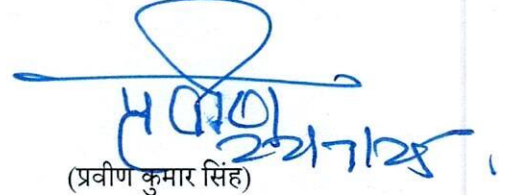

(प्रवीण कुमार सिंह)

ग्रुप कमांडर (क्रय)

फोन- 011-25663100



ईमेल- gcproc@nsg.gov.in



वितरण:


1.	संयुक्त सचिव (पुलिस आधुनिकीकरण), गृह मंत्रालय, जेसलमेर हाउस, नई दिल्ली। ई0मेल: us-prov2@mha.gov.in	सूचनार्थ हेतु।
2.	वरिष्ठ तकनीकी निदेशक, एन0आई0सी0, गृह मंत्रालय, नार्थ ब्लॉक, नई दिल्ली। ई0मेल: soit@nic.in mpsugandhi@nic.in	आपसे अनुरोध है कि उपरोक्त क्यू0आर0/टी0डी0 को गृह मंत्रालय के वेबसाईट पर पुलिस आधुनिकीकरण डिविजन-क्यू0आर0- कैटगरी - Weaponry में ऑपलोड करने का कष्ट करें तथा उक्त कैटगरी में क्रम संख्या- 26 पर दर्शाये जा रहे पुराना क्यू0आर0/टी0डी0 को वेबसाईट से हटाने का कष्ट करें
3.	महानिरीक्षक/निदेशक (आर0एण्ड डी), बी0पी0आर0एण्ड डी0, महिपालपुर, नई दिल्ली। ई0मेल- igmod@bprd.nic.in/dd-mod@bprd.nic.in	
4.	अतिरिक्त महानिदेशक, पी0पी0 एण्ड टी0, रूम संख्या- 37, एच ब्लॉक, डी0जी0क्यू0ए0, भारत सरकार, रक्षा मंत्रालय, रक्षा उत्पादन विभाग, गुणवत्ता आश्वासन निदेशालय, नई दिल्ली। ई0मेल: saarmt-dgqa@gov.in	
5.	उप महानिरीक्षक (सम्भरण), के0रि0पु0बल, केन्द्रीय कार्यालय परिसर, लोदी रोड, नई दिल्ली। ई0मेल: digprov@crpf.gov.in/ dcord@crpf.gov.in	
6.	उप महानिरीक्षक (सम्भरण), सी0सु0बल, केन्द्रीय कार्यालय परिसर, लोदी रोड, नई दिल्ली। ई0मेल : digprovfhq@bsf.gov.in / comdtord@bsf.nic.in	
7.	उप महानिरीक्षक (सम्भरण), के0औ0सु0बल, केन्द्रीय कार्यालय परिसर, लोदी रोड, नई दिल्ली। ई0मेल : digprov@cisf.gov.in, aigtech@cisf.gov.in	
8.	उप महानिरीक्षक (सम्भरण), भा0ति0सी0पु0, केन्द्रीय कार्यालय परिसर, लोदी रोड, नई दिल्ली। ई0मेल : digprov@itbp.gov.in/digcommn@itbp.gov.in	
9.	उप महानिरीक्षक (सम्भरण), एस0एस0बी0, आर0के0पुरम0, नई दिल्ली। ई0मेल: digprov@ssbde.in/ cr.ssbde@nic.in	
10.	उप महानिरीक्षक (सम्भरण), असम राईफल, (एल0ओ0ए0आर0 द्वारा) ई0मेल : loar-mha@nic.in	
11.	ग्रुप कमांडर, ऑप्स (डब्लू0ई0), मु0रा0सु0 गारद - सूचनार्थ एवं आवश्यक कार्यवाही हेतु।	
12.	मुख्यालय, सी0टी0एफ0/एस0डब्ल्यू0एस0, रा0सु0 गारद - सूचनार्थ एवं आवश्यक कार्यवाही हेतु।	
13.	स्वा0कमांडर (सम्भरण) जेम, मु0 रा0सु0 गारद - सूचनार्थ एवं आवश्यक कार्यवाही हेतु।	


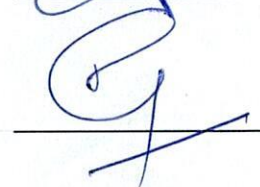
REVISED QUALITATIVE REQUIREMENT (QRs) AND TRIAL DIRECTIVE (TDs) OF 7.62 x 39 MM ASSAULT RIFLES

Sl.No	Parameters	Specification/QRs	Trial Directives(TDs)
1.	Calibre	7.62mm	OEM to provide self certificate. BOO to physically check the calibre with gauge provided by the OEM.
2.	Ammunition	The Assault Rifle should be able to fire/operate with following types of 7.62 X 39mm Ammunition: (a) Ball (b) Tracer (c) Blank	(i) Compatible with 7.62mm x 39mm Indian In-service ammunition. (ii) Tendering agency to specify in-service ammunition and make it available for trial testing on payment basis.
3.	Type of Fire	Automatic/ Semi automatic	To be physically checked by BOO
4.	Cyclic rate of fire	600 Round/minute Minimum	(i) As per Para 5.1.2.4 of JSG 0131: 2021. (ii) OEM to provide certificate from any International/ NABL accredited lab/NFSU/ DRDO labs/DGQA/ Govt. lab. OEM to provide contact person details, phone number, address, e-mail address & website of the lab. Authenticity of certificate to be confirmed by the BOO. (iii) The certificate will remain valid for 05 years from the date of its issue.
5.	Overall Length- Butt retracted/ Folded/Fixed	Folded/retracted- Not more than 750 mm Extended/Fixed- Not more than 950 mm (including muzzle attachment and excluding Bayonet)	To be physically checked by BOO
6.	Operation	Gas	To be physically checked by BOO
7.	Locking	Rotating Bolt	To be physically checked by BOO



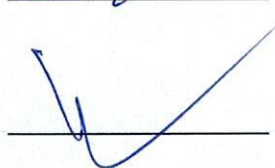

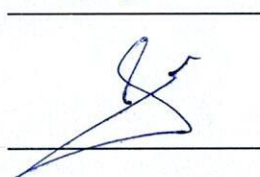
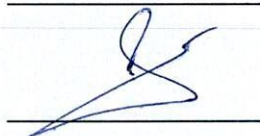







Sl. No	Parameters	Specification/QRs	Trial Directives(TDs)
8.	Weight of the Rifle with empty magazine (Including muzzle attachment and picatinny rail) Excluding Bayonet & Sight	The weight of weapon (including picatinny rails, Flash suppressor and excluding bayonet) with empty magazine should not exceed 4.0kg.	To be physically checked by BOO
9.	Ejection Pattern	Front angular 15° to 75°	To be physically checked by BOO
10.	Safety Selector Switch	Three Positions- Safe, Single & auto	To be physically checked by BOO
11.	Safety	(a) In-built safety to avoid accidental fire (b) The design of change lever should ensure that weapon fires in the desired mode only, when change lever is in its designated position.	To be physically checked by BOO
12.	Rifling	4 Grooves (Minimum)	To be physically checked by BOO
13.	Life of Barrel	Assault Rifle should have a minimum barrel life of 15000 rounds.	(i) OEM to provide certificate from any NABL/ international/ DGQA/ NFSU/ Govt lab. OEM to provide contact person details, phone number, address, e-mail address & website of the lab. (ii) Authenticity of the certificate must be confirmed by the BOO.
14.	Environmental Conditions & Ruggedness Tests.	Assault Rifle should be robust as per relevant portions of JSG0131-2021. (a) Water Immersion Test. (b) Mud Test. (c) Sand & Dust Test. (d) Rain Test. (e) Drop Test. (f) Low Temperature Test (Storage & Operation). (g) High Temperature Test (Storage & Operation). (h) Humidity Test. (j) Salt Water Test.	(i) OEM to provide certificate from any International/ NABL accredited lab/NFSU/ DRDO labs/DGQA/ Govt. lab. OEM to provide contact person details, phone number, address, e-mail address & website of the lab. Authenticity of certificate to be confirmed by the BOO. (ii) The certificate will remain valid for 05 years from the date of its issue.








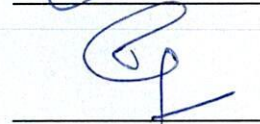



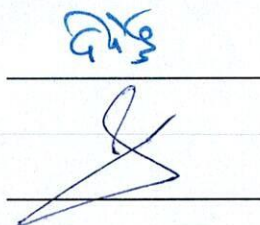



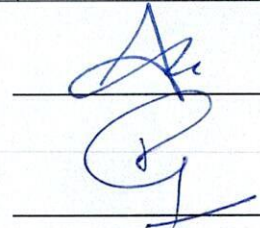


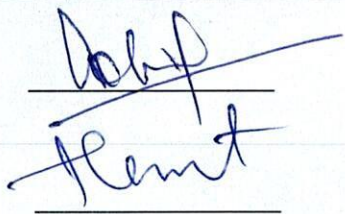Sl.No	Parameters	Specification/QRs	Trial Directives(TDs)
15.	Shine and colour of the furniture/ Metal	Black with matte finish without shine. (Tendering agency to specify different colour, if required)	To be physically checked by BOO
16.	Furniture	(a) Butt stock Assembly (i) Fixed- FRP/Metallic (ii) Folded/retractable-FRP/ Metallic	To be physically checked by BOO Visual inspection of the furniture with observation, if any to be recorded.
		(b) Hand Guard- FRP/ Metallic	To be physically checked by BOO. Visual inspection of the furniture with observation, if any to be recorded.
		(c) Pistol grip- FRP	To be physically checked by BOO
		(d) Magazine- Metallic/ FRP (To be specified by the user in the TE)	To be physically checked by BOO
17.	Magazine	Rifle must be provided with robust magazine with a capacity of not less than 30 rounds. Magazine should have firing round indicator.	To be physically checked by BOO
18.	Effective Range	300 meters or more	(a) 3.5mm Mild Steel Plate 4' x 4' Target will be placed at 300m. (b) Three weapons in unfolded butt condition will be evaluated for the parameter. (c) Seven (07) out of ten (10) rounds should hit on 4' x4' target. (d) Rifles may be fired from a fixed mount after zeroing. (e) Additional rounds will be given in case of misfire. (f) Maximum of three attempts will be provided. (g) Temperature should be between minus 20°C and plus 45°C. Same will be recorded. (h) 3.5mm MSP of 4ft will be provided by Vendor on date of submission of EUT.


Hemant

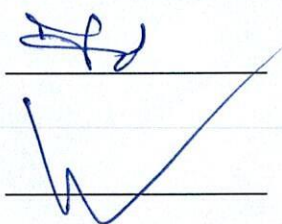









Sl.No	Parameters	Specification/QRs	Trial Directives(TDs)
19.	Muzzle Velocity	Minimum 700 m/s.	(i) OEM to provide certificate from any International/ NABL accredited lab/NFSU/ DRDO labs/DGQA/ Govt. lab. OEM to provide contact person details, phone number, address, e-mail address & website of the lab. Authenticity of certificate to be confirmed by the BOO. (ii) The certificate will remain valid for 05 years from the date of its issue.
20.	Flash Suppressor	7.62 x 39mm Assault Rifle should have a flash suppressor	To be physically checked by BOO
21.	Picatinny rail	The Assault Rifle should have minimum two picatinny rails (MIL-STD 1913) at the 12 O'clock & 6 O'clock position to accommodate sights & other accessories.	Physical verification by fitting the existing holographic sight & TI sight onto the weapon by BOO.
22.	Provision for mounting UBGL 40mm	Weapon should be able to mount UBGL (Type of UBGL to be specified by the user)	To be physically checked by BOO






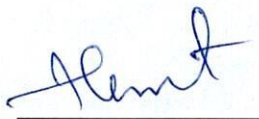


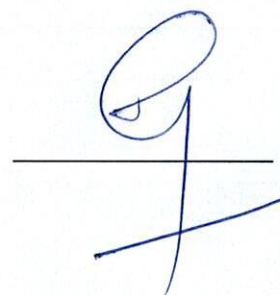
Sl.No	Parameters	Specification/QRs	Trial Directives(TDs)
23.	Accuracy & Hit Probability	<p>(i) Single Shot- Firing from a fixed mount at 100m range, nine hits out of ten shots fired should be in a group size of diameter of 12cm.</p> <p>(ii) Automatic Fire – Firing from a fixed mount at 100m Range, when one full magazine is fired in short bursts of two to three rounds, it should achieve minimum 60% hits within a circle of diameter 30cm.</p> <p>(iii) Fixed mount will be provided by the vendor.</p>	<p>(i) To be physically checked by BOO</p> <p>(ii) OEM to provide firer and target. In case OEM requests for a firer from user agency, it is to be provided only after obtaining NOC to the effect that "OEM will not question/claim the skill of the firer and the result of trial firing will be acceptable to him".</p> <p>(iii) Trial team including firers will carry out familiarization with the weapon for one day prior to commencement of trials. During familiarization period, weapons will be fired by all firers during day and night.</p>
24.	Robustness	The weapon will be put through normal obstacle course and once again subjected to accuracy test.	To be physically checked by BOO
25.	Reliability	<p>(a) Should not have more than Three Class I/ Class II stoppages out of which not more than one should be Class II stoppage and No Class III stoppage in a firing cycle of 2400 rounds, conducted as per TOP 3-2-045.</p> <p>(b) Stoppages are classified as under:-</p> <p>(i) Class I Stoppage – Can be removed by the firer within 10 seconds without use of any tools, equipment or spares by immediate action procedures.</p> <p>(ii) Class II Stoppage – Can be removed by firer in 10 seconds to 10 minutes with tools, equipment or spares issued with the weapon.</p> <p>(iii) Class III Stoppage - Takes more time than 10 minutes or special tools/spares to rectify defects and to resume firing by the firer.</p>	<p>(i) 2400 rounds will be fired.</p> <p>(ii) Procedure as per TOP 3-2-045.</p> <p>(iii) All the stoppages will be noted as per their classification.</p> <p>(iv) One weapon will be evaluated in unfolded butt condition.</p> <p>Procedure Disassemble, clean, inspect, lubricate and reassemble weapon.</p> <p>Firing Cycle Each cycle will comprise firing of 120 rounds. 60 rounds in single shot mode @ 60 rounds per minute and 60 rounds in short burst mode of 2-3 rounds @ 85 rounds per minute will be fired. Each cycle to be followed by minimum 10 minutes of cooling.</p> <p>After every 240 rounds (2 cycles), allow complete cooling of weapon to the point that barrel can be held in a bare hand indefinitely.</p> <p>After every 1200 rounds (10 cycles) disassemble, clean, lubricate and inspect weapon.</p> <p>Continue above process till 2400 rounds.</p> <p>Temperature should be between minus 20°C and plus 45°C. Same will be recorded.</p>




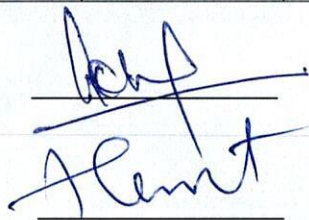





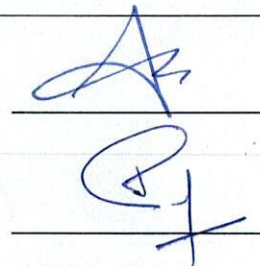




Sl.No	Parameters	Specification/QRs	Trial Directives(TDs)
26.	Operating/Storage Temperature		
	(a) Operating Temperature	-20°C to + 50°C	(i) OEM to provide certificate from any International/ NABL accredited lab/NFSU/ DRDO labs/DGQA/ Govt. lab. OEM to provide contact person details, phone number, address, e-mail address & website of the lab. Authenticity of certificate to be confirmed by the BOO. (ii) The certificate will remain valid for 05 years from the date of its issue.
	(b) Storage Temperature	-20°C to + 50°C	
	(c) Humidity	95% at temp +40°C	
27.	Zeroing	All weapons will be zeroed from 100m prior to commencement of trials. Difficulties if any, in the method and accuracy of zeroing would be recorded.	To be physically checked by BOO
28.	Night Firing.	Handling and firing of weapons will be carried out during the night.	To be physically checked by BOO
29.	Service Life of Weapon	Assault rifle should have minimum service life of 15 years/ 15000 rounds whichever is earlier.	OEM to provide self certificate.
30.	Vertical Forehand Grip.	A removable vertical forehand grip should be provided with the Assault Rifle. The vertical forehand grip should be attachable to the 6 O'clock rail and should be positively secured without the use of tools.	(i) To be physically checked by BOO. (ii) Three (03) weapons will be made to fire in unfolded butt condition in two positions I,e single and Auto with a full magazine in each mode. (iii) The forehand grip should be removable and attachable. Vertical forehand grip of all three weapons should remain positively secured after firing.

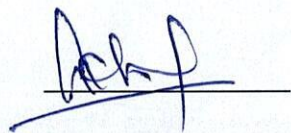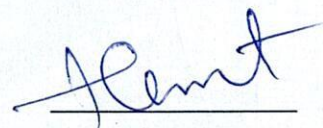


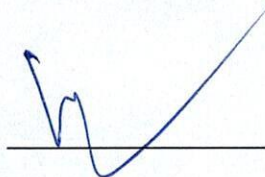


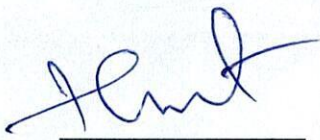
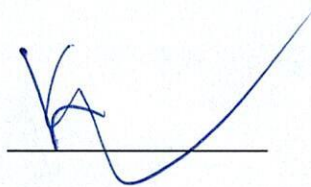






Sl.No	Parameters	Specification/QRs	Trial Directives(TDs)
31.	Accessories	(i) Shoulder strap/ Sling- One per weapon.	To be physically checked by BOO
		(ii) Magazine - Five per weapon (one with rifle plus four)	To be physically checked by BOO
		(iii) Bayonet with Scabbard- (Optional) User to specify.	To be physically checked by BOO
		(iv) Portable case / Belt attachment pouches-which accommodates 4 pcs of magazines of 30 rounds (Optional). User to specify.	To be physically checked by BOO
		(v) Blank Cartridge Nozzle- User to specify.	To be physically checked by BOO
		(vi) Cleaning kit (OEM to specify the items provided) - One per weapon.	To be physically checked by BOO
		(vii) Three point sling - (Optional) User to specify.	To be physically checked by BOO
		(viii) Tools for zeroing, (Optional), maintenance & repairs in field conditions - User to specify.	To be physically checked by BOO
32.	Engineering Support Package		To be physically checked by BOO
	The manufacturer should provide engineering support package including:-		
	(a) Technical literature		To be physically checked by BOO
	(b) Training manuals, Repair Manuals, User hand books and Preservation instructions to be provided in Hindi and English.		To be physically checked by BOO
	(c) Illustrated spare parts list duly priced		To be physically checked by BOO

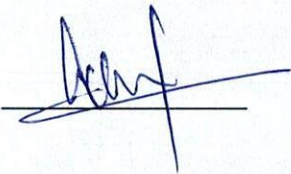





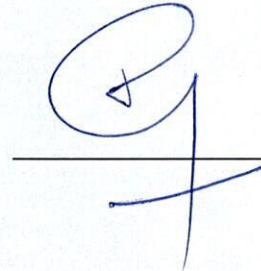








Sl.No	Parameters	Specification/QRs	Trial Directives(TDs)
	(d) List of STEs/SMTs/Test Jigs/Gauges for Base and Field Repairs to be provided		To be physically checked by BOO
	(e) Recommended list of spares for 15 years to be provided by OEM.		To be physically checked by BOO
	(f) Undertaking for spare back up by the OEM for next 15 years		To be physically checked by BOO
	(g) Recommended list of gauges to be provided by OEM. Quantity of gauges required to be specified by the user at the time of tendering.		To be physically checked by BOO



Insp/Ex. AK Anashtu
CISF HQs



(Jugraj Singh)
ADDA/SA
DGRA



(Devender Singh)
DC/AIA, SSB



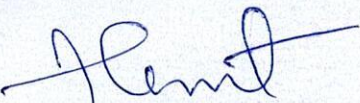Pramjeeth
(DC/AIA)



BHOMPAL AC/ARMA
ITBP(LB)



Major Hemant K. Yadav
(DG Assam Rifles)


Mr. Kanishk
SSR



Lt Col SK Mahata
SC(WF), NSG


Col Anil Chopra (Retd)
BPRBD


Rajesh Ranjan
GC (Proc), HQ NSG


Praveen Kaur, IPS
IG (Proc), NSG

Approved/ ~~Not Approved~~


(B Srinivasan) IPS
Director General, NSG